



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 173 715 B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **22.04.92** (51) Int. Cl.⁵: **B05D 5/12, B05D 3/04**

(21) Application number: **85901214.8**

(22) Date of filing: **12.02.85**

(86) International application number:
PCT/US85/00219

(87) International publication number:
WO 85/03460 (15.08.85 85/18)

(54) **METHOD AND APPARATUS FOR THE GAS JET DEPOSITION OF CONDUCTING AND DIELECTRIC THIN SOLID FILMS AND PRODUCTS PRODUCED THEREBY.**

(30) Priority: **13.02.84 US 579676**

(43) Date of publication of application:
12.03.86 Bulletin 86/11

(45) Publication of the grant of the patent:
22.04.92 Bulletin 92/17

(64) Designated Contracting States:
AT BE CH DE FR GB LI LU NL SE

(56) References cited:

GB-A- 2 098 241	US-A- 2 155 932
US-A- 3 382 845	US-A- 3 654 895
US-A- 3 808 035	US-A- 3 840 391
US-A- 3 850 679	US-A- 4 033 286
US-A- 4 351 267	

No relevant documents have been disclosed.

(73) Proprietor: **SCHMITT, Jerome J. III**
265 College Street Apt. 12N
New Haven, CT 06510(US)

(72) Inventor: **SCHMITT, Jerome J. III**
265 College Street Apt. 12N
New Haven, CT 06510(US)

(74) Representative: **Kirby, Harold Douglas Benson et al**
G.F. Redfern & Company Marlborough Lodge
14 Farncombe Road
Worthing West Sussex BN11 2BT(GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates generally to the field of thin solid film coating deposition technologies which are techniques for fabricating materials in the form of a thin solid film coating on a substrate material. In particular, the invention described herein makes possible deposition of both old and new materials under conditions of lower vacuum than required by other technologies. Such coating materials can have unusual and remarkably useful properties, especially in the areas of electronics, optics, wear surfaces, protective coatings, catalytic materials, powder metallurgy, and biomedical implant surface coating.

In recent years, in the prior art much effort has been directed toward development of economically viable techniques for manufacturing various useful materials in the form of thin solid films which overlay a supporting solid substrate material, such as corrosion resistant materials, which provide chemical protection for the supporting material (e.g. an oxide coating on an aircraft engine's turbine blades). There are many differing technologies in use today, yet they can all be classified under one of the following five categories:

- 1) Physical Vapor Deposition
- 2) Chemical Vapor Deposition
- 3) Electro - and Electroless Deposition
- 4) Thermal Spraying methods
- 5) Polymeric Coating methods

However, all these diverse methods involve the following three steps: (1) Synthesis of the depositing species; (2) Transport of the depositing species from its source or place of synthesis to the site of deposition; (3) Deposition and subsequent film growth.

It is recognized that in the prior art the same thin film material may be susceptible to formation by several different techniques. For example, thin films of amorphous hydrogenated silicon, which can be used in solar power conversion technology, may be fabricated by three radically different techniques: (1) Plasma deposition; (2) Sputtering and (3) Chemical Vapor Deposition (see e.g. M.H. Brodsky, "Plasma Preparation of Amorphous Silicon Films", Thin Solid Films 50, 1978 Elsevier Sequoia S.A., Lausanne -- The Netherlands; T.D. Moustakas, et al, "Preparation of Highly Photoconductive Amorphous Silicon by RF Sputtering", Solid State Communications 23, 1977 Pergamon Press -- Great Britain; S.C. Gau, et al, "Preparation of Amorphous Silicon Films by Chemical Vapor Deposition From Higher Silanes", Applied Physics Letters 39 (5), 1981 American Institute of Physics). Often an innovation in deposition technology manifests itself not as a direct improvement in the product material, but rather as an economic im-

provement in the process technique. It is to an improvement in the process that my inventions of both apparatus and method make possible, for which the use of simple flow systems, deposition of thin film materials are achieved, which previously required methods which employed complicated high vacuum apparatus. The result also makes possible synthesis and deposition of new structures of known chemical species.

US Patent 3,850,679 describes a process of coating a glass surface with a metal oxide, wherein a mixture of carrier gas, vaporised solvent, and vaporised metal containing reactant is formed in a vaporising chamber, and thereafter passes to a distribution chamber where it is accelerated in convergent nozzles and directed towards the substrate to be coated. Since the solvents and reactants used in this process are generally solid or liquid at room temperature, heating jackets are extensively arranged around the vaporising chamber and nozzles in order to prevent unwanted condensation of the reactants within the apparatus.

My inventions allow one to produce a useful thin solid film material by depositing from the gas-phase a saturated chemical vapor species onto a substrate material through the use of a high speed jet of inert carrier gas to transport the depositing chemical species -- present in dilute concentrations in the carrier gas -- from the site where the synthesis of the depositing vapor species occurs to the substrate material where condensation and deposition occurs.

Other objects, advantages, and novel features of my inventions, as well as the need and motivation for using the broad term "useful thin solid material", will without departing from my inventions become apparent to those skilled in the art both now and in the future upon examination of the following detailed description of the preferred embodiments of my inventions, and the accompanying drawings, in which: Figure (1) depicts a preferred embodiment of an apparatus useful for my invention. There is shown a nozzle 1-1, and a chamber 1-2 downstream of the nozzle 1-1 termed herein the deposition chamber. An inert flowing gas shown as streamlines 1-3 acts as the carrier fluid. A mechanical pump 1-4 induces a steady flow of the inert carrier gas 1-3 from the gas supply 1-5 through the inlet 1-6. The flow proceeds through the nozzle 1-1 into the deposition chamber 1-2, where it forms a jet 1-7. The flow exits via an outlet 1-8. If desired, the carrier gas may be recirculated by a recirculation loop 1-9. Within chamber 1-2 is positioned the substrate 1-10 on which the product thin film 1-11 is deposited. The film thickness is exaggerated for illustration. The nozzle 1-1 and the substrate 1-10 may move relative to one another in order to change the area of the substrate's 1-10

surface which is directly under the nozzle 1-1 and thereby coat a larger portion of that surface. A transport mechanism 1-12 achieves this motion by moving the substrate. (Alternately, the nozzle 1-1 could be mounted on a mechanism which moves it relative to a stationary substrate 1-10. The concept of relative motion to coat a broad area of the substrate surface is amplified in Figure (11). An apparatus 1-13 for heating and/or cooling the substrate is also depicted, as well as a means 1-14 for heating or cooling the carrier gas before it enters the nozzle 1-1 through the inlet 1-7. A port 1-15 provides access to the deposition chamber 1-2. The regions R1 and R2 of the flowfield, schematically contained within the broken lines of Fig. (1), are significant in the description of the deposition process which follows below.

Figure (2) depicts a specific example of the preferred method in which a particular material is deposited, in this case: tungstic-oxide. In addition to the general features of the apparatus depicted in Figure (1) -- for which features Figure (2) has the same illustration numbers -- there are also illustrated features necessary for the deposition of tungstic-oxide. The carrier gas depicted as streamlines 1-3 is helium (although any other inert fluid could also be employed). A dilute concentration of oxygen 2-1 (exaggerated oxygen molecules depicted as open circles) which has been premixed in the helium 1-3 contained in the gas supply 1-5 enters through the inlet 1-7. There is shown an tungsten filament 2-2 (which is a solid cylindrical rod oriented transverse to the plane of Figure (2)). Also illustrated are evaporated tungsten atoms 2-3 (closed circles) and tungstic-oxide radicals 2-4 (connected pairs of open and closed circles). The tungstic-oxide deposit 2-5 is shown being formed on the prepared substrate 1-10. The method for the formation of an tungstic-oxide deposit is described below.

Figure (3) is an enlargement of an important portion of Figure (1). That portion is the nozzle exit region of the flowfield, which contains the part of the flow region R1 furthest upstream in the flow (see Figure (1)). The nozzle walls 3-1 represent the end of the converging part of the nozzle, the nozzle throat, and exit as depicted by 1-1 in Figure (1). The streamlines 1-3 represent the flow of the inert carrier gas through the nozzle. A saturated chemical-vapor species 3-2 (molecules of which are signified by small circles) originate at some source 3-3 (depicted as a large open circle) centered in the flowfield. The flow of the carrier fluid entrains this condensible molecular species and convects them through the nozzle and beyond the nozzle exit 3-4. The region of the flowfield which contains condensible species is demarcated by broken lines, which region is termed herin region

R1.

Figure (4) illustrates one mechanism for introducing chemical reaction precursor species as dilute components in mixture with the flow of the inert carrier fluid. The nozzle 1-1 and inlet 1-6 as well as the inert carrier gas streamlines 1-3 of Figure (1) are reproduced here. The remainder of the apparatus depicted in Figure (1) is assumed to be in place, but is not represented in Figure (4). For this mechanism, an undersaturated vaporous precursor species 4-1 (molecules of which are depicted as open circles) has been premixed in the carrier fluid upstream of the inlet.

Figure (5) illustrates an additional mechanism for introducing precursor species into the flow of the carrier fluid. Again, the nozzle 1-1, inlet 1-6, and streamlines 1-3 of Figure (1) are reproduced, but it is assumed that the remaining unrepresented features of the apparatus depicted in Figure (1) are in place as well -- they are just not reproduced here in Figure (5). In this mechanism, the precursor species is present initially in solid or liquid state. This solid or liquid material 5-1 (represented as a large open circle) is held in place in the flowfield, and is then heated to evaporate (or sublime) molecules 5-2 off into the gas-phase (These molecules are depicted as small open circles). These molecules are entrained in the flow of the carrier gas and converted through the nozzle.

Figure (6) illustrates another method of precursor species introduction. Again, the nozzle 1-1, inlet 1-6 and streamlines 1-3 of Figure (1) are reproduced. The remainder of the apparatus shown in Figure (1) is assumed also to be in place, but is not depicted. In this mechanism, the reactant species 6-1 (molecules of which are depicted as open circles) are in gas or liquid phase, and are introduced via a thin tube 6-2 which exits into the region R1. The reaction precursor species is assumed to originate from a supply source which is not depicted.

Figure (7) illustrates the correlation between relative intensity and velocity of the jet.

Figures (9),(10) and (11) serve to illustrate the flow of the carrier gas past -- and the deposition of the condensing species on -- three types of substrate differentiated by their geometries. These substrates would be substituted for the substrate 1-10 of the apparatus in Figure (1). The only feature of Figure (1) actually reproduced in these Figures is the carrier gas jet 1-7 which is depicted as streamlines, but the remainder of that apparatus is assumed to be in place -- it is merely not depicted. These Figures serve to illustrate the three possible generalized cases of substrate geometry and the consequent effect of these cases on the flow field of the gas mixture and the deposition process.

Figure (8) shows the flow of the jet 1-7 past a

generalized "bluff body" or substrate 9-1 of low or zero curvature. Curvature must be compared to the width of the jet 1-7. The streamlines of the carrier gas jet 1-7 impinge on the surface and then flow along the surface away from the site of impingement termed herein the "stagnation point". The molecules 9-2 of the depositing species are convected by the carrier gas flow to the substrate surface where they condense to form the thin film coating 9-3. The deposit's thickness is exaggerated in this Figure for the purpose of illustration. The deposition is most concentrated at the stagnation point 9-4.

Figure (9) illustrates the flow field around a "sharp-edged" substrate 10-1, with its edge directed into the flow of the jet 1-7. In this case, the stagnation point 10-4 occurs at the edge itself, and the deposition is concentrated there. Again, the molecules 10-2 of the depositing species condense to form a thin film coating 10-3.

Figure (10) shows the jet's 1-7 flow past a substrate 11-1 of large curvature. Curvature must be compared to the width of the jet 1-7. In this case, the streamlines of the carrier gas jet 1-7 flow around the substrate 10-1 and rejoin downstream. The molecules 11-2 of the depositing species are convected by the carrier fluid 1-7 to the substrate's 11-1 surface where they deposit to form a thin film coating 11-3. In this case too, there is a stagnation point 11-4 at which the deposition will be most concentrated.

Figure (11) illustrate the concept of employing the mechanism 1-12 of the apparatus of Figure (1) to move the substrate 1-10 relative to the jet 1-7 (or the nozzle 1-1, since the jet is emitted from the nozzle). Alternately, there may be a mechanism that moves the nozzle 1-1 relative to a stationary substrate 1-10. Therefore to illustrate the general notion of substrate motion relative to the jet 1-7, only the jet 1-7 and the substrate 1-10 of Figure (1) are reproduced here (the substrate 1-10 is re-labeled 12-1), although the remainder of the apparatus in Figure (1) is assumed to be in place here as well. Also, for the purposes of illustration, a "bluff body" substrate as depicted in Figure (8) is shown here as the substrate 12-1, although a "sharp-edged" substrate (see Figure (9)) or a substrate with large curvature relative to the jet's 1-7 width (see Figure (10)) could be substituted for the substrate 12-1 as well. The point Figure (11) serves to illustrate is that as the substrate 12-1 is moved relative to the jet 1-7, the stagnation point 12-4 of the carrier gas flow -- which is also the site where the deposition of the condensing species is most concentrated -- moves across the surface of the substrate 12-1. (The direction of substrate 12-1 relative motion to the jet 1-7 is indicated in Figure (11).) Thus, there is not just one point on the

substrate's 12-1 surface where deposition is concentrated, but rather the concentrated deposition occurs across the surface, and if the motion is at a uniform rate (also, of course, assuming the condensing species 12-2 arrive at the stagnation point at a constant rate) then a thin film 12-3 of uniform thickness will condense on the substrate's 12-1 surface.

Figure (12) shows the use of the apparatus illustrated in Figure (1) in "batch mode" for the coating of "batches" of substrates. Only the jet 1-7 of Figure (1) is reproduced in Figure (12) although the rest of the apparatus of Figure (1) is assumed to be in place. Substituted for the substrate 1-10 of Figure (1) is a mechanism 13-1 for holding and transporting individual substrates 13-2 into and through the flow of the jet 1-7 where they receive their thin film coating 13-3 as the jet 1-7 transports the condensable species 13-4 to the surface of the individual substrates 13-2. Although the "sharp-edged" substrates of Figure (9) are depicted as the individual substrates 13-2 in Figure (11), the other substrate geometries shown in Figures (9) and (11) are also possible individual substrates for the "batch mode". All the individual substrates 13-2 are contained in the deposition chamber 1-2 of Figure (1) (not depicted). After the entire batch of substrates 13-2 are coated, the deposition is complete, and the deposition chamber 1-2 is opened to remove the coated substrates 13-2.

Figure(13) illustrates the use of the apparatus in Figure (1) in "semi-continuous" mode of deposition. Only the jet 1-7 of Figure (1) is reproduced here, although the balance of the apparatus depicted in Figure (1) is also assumed to be in place. Substituted for the substrate 1-10 of Figure (1) is the substrate 14-1 in the form of rolled stock (e.g. rolled sheet metal). This rolled stock is unwound from one spool 14-2, passed through the jet 1-7 which transports the condensable species 14-3 to its surface, and receives its thin film coating 14-4 at the stagnation point 14-5. Finally, the coated substrate stock is rewound on another spool 14-6. Both spools are contained within the deposition chamber 1-2 of Figure (1) (not depicted here). After the rolled stock is coated and rerolled on the receiving spool 14-6, the deposition is complete, so the deposition chamber 1-2 is opened and the coated substrate removed. Both "bluff body" substrates (see Figure (8)) -- e.g. rolled sheet metal -- or substrates with large curvature (see Figure (10)) -- e.g. coiled wire -- may be coated with thin film material in the "semi-continuous" mode. Even "sharp-edged" substrates (see Figure (9)) may be coated in this manner provided they are capable of being rolled or coiled.

Figure (14) illustrates the use of the apparatus of Figure (1) for the production of powdered materi-

als as used in metallurgy. Only the jet 1-7 of Figure (1) is reproduced here, although the entire apparatus depicted in Figure (1) is assumed to be in place. Substituted for the substrate 1-10 of Figure (1) is a rotating drum 15-1 (with sides which act as a target surface area where condensation occurs). The jet 1-7 transports the depositing species 15-2 to the surface of the drum 15-1 where deposition occurs at the stagnation point 15-3. As the depositing species 15-2 condenses and forms a thin film coating 15-4 on the rotating drum 15-1, the thin film material 15-4 subsequently revolves around with the drum 15-1, and encounters a scraper 15-5 which removes the material 15-4 from the drum 15-1. This material, in powdered form 15-6, is collected in a hopper 15-7. The entire apparatus in Figure (14) is contained within the deposition chamber 1-2 of Figure (1) (not depicted). When the hopper 15-7 is filled with the powder 15-6, the deposition process is discontinued, and the deposition chamber 1-2 is opened to remove the powder for use in powder metallurgy. Also depicted are heating and cooling mechanisms 15-8 for heating and/or cooling the drum surface to facilitate the deposition and powdering processes.

Figure (15) depicts an alternate embodiment of the apparatus depicted in Figure (1) which is similar to the arrangement illustrated in Figure (14). Figure (15) represents an apparatus which is substituted for the substrate 1-10 of Figure (1), and is used for the production of thin sheets of material. The only feature of Figure (1) reproduced here is the jet 1-7, although the remainder of the apparatus is assumed to be in place. The jet 1-7 transports the depositing species 16-2 to the surface of a rotating drum, 16-1 (which acts as a target condensation area) where that species condenses at the stagnation point 16-3 to form a thin film 16-4. The drum 16-1 rotates and the film 16-4 encounters the scraper 16-5 which peels the film off the drum 16-1 so that the material is in the form of a thin sheet 16-7. A mechanism 16-6 pulls and transports the sheet material 16-7 off the drum 16-1. The entire apparatus is contained within the deposition chamber 1-2 of Figure (1) (not depicted). After fabrication of the sheet material 16-7, the deposition process is complete and the chamber 1-2 is opened so that the sheet stock 16-7 can be removed. Mechanisms 16-8 for heating and/or cooling the drum 16-1 to facilitate the deposition and peeling processes are depicted.

Figure (16) depicts the experimental apparatus. The gas flow originates in a storage cylinder (not depicted), and enters the apparatus via a pipe through inlet 17-1. The flow is regulated with the needle valve 17-2, and the throttle valve 17-14. The pressure upstream of the small orifice 17-4 is measured by a mercury manometer (not depicted) at-

tached to the flow system at 17-3. The flow pressure upstream of the nozzle 17-10 is measured by an oil manometer (not shown) attached at 17-7. The gas flows through the nozzle 17-10 into the deposition chamber 17-8, which is a glass bell jar. (The cross-hatched components are machined brass.) The lower pressure in the deposition chamber is measured with an oil manometer (not depicted) attached at 17-13. The gas flow forms a jet as it exits the nozzle 17-10, which jet impinges on the substrate 17-11 (usually a microscope slide). The nozzle to substrate distance may be adjusted with the thumbscrew 17-12. A tungsten filament 17-9 is placed just upstream (within one nozzle diameter) of the nozzle throat section (see Figure (17)). A line-of-sight 17-5 is maintained to the filament 17-9, so that a measurement of its temperature can be taken using an optical pyrometer 17-6. The flow finally exits through the throttle valve 17-14 and is pumped away by a rotary pump (not depicted) attached at 17-15.

Figure (17) shows the cross-sections of two nozzles used in the experimental demonstrations. Both were of conical symmetry and were made of brass. The dimensions of the throat diameter and length are indicated.

Before turning in detail to the drawings, since my invention departs so greatly from prior practices, I will describe some of the theory behind my invention. The modern theory of Physical Chemistry tells one that a chemical reaction is completely specified by the thermodynamic variables such as pressure, temperature, etc. which govern the molecular behavior of that reactions constituent chemical species, along with the specific reaction mechanisms and associated activation energies (which energies may be introduced by radiation, thermal conduction, etc.). Because this deposition technique affords great flexibility and control in specifying these variables, there is a large number of chemical reactions which potentially could be induced to occur by the following described method. The final product of such reactions is the desired useful phase of a solid in thin film form. This may be deposition on a substrate, where it remains, but also alternately collected at a target area from which it can be removed (see Figures (15) and (16)). This alternate embodiment may be preferred in, say, powdered metallurgy uses.

Rather than trying to present an exhaustive list of all possible and anticipated useful reactions, the following summary will treat the general problem of depositing a thin film by the present technique, as embodied in my preferred embodiments in the three steps:

- 1) Synthesis or formation of depositing vapor species
- 2) Transport of said species from source to

substrate

3) Condensation of species and film growth.

Using the three steps of my process, the general problem of condensing a chemical species from the vapor phase into the form of a useful thin solid film, which coats the surface of a supporting solid material, may be solved with new results.

By the use of the high speed mass flux of an expanding inert gas as a carrier mechanism for transporting a dilute concentration of a saturated metal-vapor species from the site where that species was synthesized to the object to be coated, where the condensation occurs, a thin solid film product may be formed (metallic or metal-compound). The advantages in using this system are manifold. Foremost is that the inert carrier gas transports the saturated metal-vapor quickly that there is no time for condensation to occur on anything except the object to be coated (i.e. unintentional depositions on the apparatus' chambers' walls are largely avoided). Thus nearly 100% of the synthesized depositing species is used in forming the thin film. Other advantages include the utilization of the full flexibility of gas-phase chemistry for formation of the depositing species; the system allows high depositing rates; the mechanism is continuously self purging; and it affords independent control of the quench rate. The last advantage arises because the substrate temperature during condensation can be varied at will.

A preferred embodiment of an apparatus useful for my inventions is depicted in Figure (1). There is shown a nozzle 1-1, a chamber 1-2 downstream of the nozzle 1-1 termed herein the deposition chamber. An inert flowing gas shown as streamlines 1-3 acts as a carrier fluid. A mechanical pump 1-4 induces a steady flow of the carrier gas 1-3 from the supply 1-5 through the inlet 1-6 and nozzle 1-1. The fast moving gas flowing through the nozzle 1-1 enters the deposition chamber 1-2 and forms a jet 1-7. It is this jet 1-7 which impinges on the substrate 1-10 that achieves the transport of the depositing species (not depicted). The depositing species may be synthesized in the region R1 of the flow field, which extends from just upstream of the nozzle throat, through the throat region, (see Figure (3)) and extends the length of the jet. The deposition occurs in region R2 which borders the surface of the substrate. Finally, the gas exits via outlet 1-8 and is exhausted, or if desired the carrier gas 1-3 may be recirculated via a recirculation loop 1-9. The substrate 1-10 is prepositioned in the deposition chamber 1-2, on which the product thin film 1-11 is deposited. A transport mechanism 1-12 moves the substrate 1-10 past the nozzle 1-1 and through the jet 1-7. An alternate embodiment, which may be preferred, would include a mechanism causing the nozzle 1-1, and therefore the jet

1-7, to move relative to a stationary substrate 1-10. The jet 1-7 is caused to be moved relative to the substrate 1-10 in order to coat a larger area of its surface, as amplified in Figure (11). A mechanism 1-13 heats and/or cools the substrate 1-10 during the deposition in order to facilitate the fabrication of the thin film 1-11. Also a mechanism 1-14 heats or cools the carrier gas 1-3 in order to facilitate the transport of the depositing species, and to optimize the thermodynamic conditions governing the synthesis and condensation reactions. A port 1-15 allows access to the deposition chamber 1-2 before and after the deposition process.

The flow geometry, flow speed and the carrier gas pressure can be arranged so that the synthesis of the depositing saturated vapor species occurs near the center of the forming jet and does not allow time for diffusion of those species to the walls of the apparatus which border region R1. This is amplified in Figure (3) which is a magnification of the beginning of the flow region R1. In Figure (3), the saturated species 3-2 originates at some source 3-3 centered in the flow field of the inert carrier fluid, depicted as streamlines 1-3. The fast moving carrier fluid 1-3 convects the saturated species 3-2 past the nozzle's 1-1 (see Figure (1)) throat's walls 3-1, before that species has time to diffuse to them. In this manner, unwanted condensation on the throat's walls 3-1 is avoided. The depositing species 3-2 is transported beyond the nozzle exit 3-4 into the deposition chamber 1-2 (not depicted), and the flow now constitutes a free jet 1-7.

Referring again to Figure (1), the flow speed of the jet 1-7 slows as it encounters the solid substrate 1-10 in flow region R2, and here the saturated vapor species migrates to the objects solid surface where they form a deposit. The inert carrier and any unreacted gaseous reaction precursor molecules flow downstream and are pumped out at the exit 1-8. If a gas mixture containing unreacted gaseous species is recirculated via the recirculation loop 1-9 then these reactants as well as the carrier gas are recovered for further use. Further amplifications of the general deposition process follow below.

Figure (2) illustrates a specific example of the method, which is described now so as to give a concrete example that will illuminate the generalized discussion of the deposition method which follows below. All the features of the general apparatus of Figure (1) are reproduced in Figure (2) (which utilizes the same reference numbers as Figure (1)), except the flow regions R1 and R2 are not demarcated. Also included are the additional specific elements necessary for deposition of a particular material: tungstic-oxide. A gas mixture, which originates in the supply 1-5 and contains

dilute concentrations of oxygen 2-1 (open circles) in helium 1-3 (depicted as streamlines) enters through the inlet 1-6 and flows over the tungsten filament 2-2 (the large shaded circle which depicts the cross section of a solid tungsten cylinder oriented transverse to the plane of Figure (2)). An electric current from a power supply (not shown) is passed through the tungsten filament 2-2 to resistively heat it to temperatures at which evaporation of tungstic-oxide occurs. The oxygen 2-1 in the flow reacts with the hot solid filament to form a surface oxide. This oxide evaporates due to the high temperature of the tungsten filament 2-1, and the tungstic-oxide vapor molecules 2-3 and 2-4 (schematically depicted as open circles and circle pairs with one open and one shaded) are entrained in the helium flowing around the filament. These saturated vapor molecules 2-3 and 2-4 (saturated because the helium stream is cool) are convected by the flow 1-3 downstream to the cool substrate 1-10 where they condense to form a tungstic-oxide deposit.

According to the invention, the thin solid film is produced in a process of which my various preferred steps are described below:

1. Synthesis of Depositing Species.

This step may be achieved in several ways exploiting physical and/or chemical phenomena as described below. It will be important to observe that in my process, all vapor species which will saturate at the prevailing gas temperature must be confined to region R1 of the flow field (see Figures (1) and (3)). This temperature may be varied over a wide range to avoid premature condensation of a given reactant species by employing the gas heating/cooling mechanism 1-14 of the apparatus depicted in Figure (1) -- but it is anticipated that for many reactions the gas need only be at room temperature. All experimental demonstrations were performed with unheated gases, but the only theoretical limit on the gas temperature is that it must be cool enough in the flow region R2 for condensation to occur in the desired manner. The important point is that once a saturated vapor species is formed in region R1, it must be transported so quickly that it does not have time to condense on the nozzle's walls. (See Figure (3), and the text describing it.) Thus, the problem becomes one of delivering the reaction precursor molecules to the region R1 and inducing a reaction to occur which synthesizes the depositing species.

This delivery can be achieved in three distinct ways as illustrated in Figures (4),(5) and (6): 1) The precursor (or precursors) as shown in Figure (4) may be a vapor or gas species 14-1, which is in undersaturated in the gas-phase at the prevailing

temperature of the carrier gas 1-3. Then it can be mixed into the carrier far upstream and introduced into region R1 along with the carrier's 1-3 flow through the nozzle 1-1, where the precursor 4-1 is then acted upon to synthesize a condensable species. (A description of such actions follows shortly.) This mechanism may be employed to introduce metal-bearing gaseous molecules (say silane or an organo-metallic salt) which is then used to synthesize a depositing metal-vapor, or it may be used to introduce reactive gas (say oxygen or a halogen) which reacts with a metal vapor in the formation of a metal-compound deposit (say a metal-oxide). Or 2) as shown in Figure (5) the precursor species may be in solid or liquid form as a material 5-1, (depicted as a large circle) which is held in place directly in the flow field of gas 1-3 through the nozzle 1-1 at region R1 and subsequently heated (by some means not depicted, e.g. resistive heating of the material itself, or through contact with a heated surface, or with a laser) to evaporate (or sublime) off molecules 5-2, which then become entrained in the carrier gas flow 1-3. Or 3) as shown in Figure (6) the reactant species may be molecules 6-1 of a fluid injected via a thin tube 6-2 into the flow region R1, where they are entrained in the flow of the carrier gas 1-3 through the nozzle 1-1.

Each mechanism can be used multiply in the same apparatus, in order to introduce several species, i.e. there can be two or more reactants, premixed in the carrier fluid (mechanism 1); or several solid or liquid materials placed in the flow (mechanism 2); or several thin tubes exiting in the region R1, each transporting a different species (mechanism 3). All three methods may be used simultaneously to deliver two or more reactant species to region R1 to achieve synthesis of the depositing species. As a specific preferred embodiment illustrated by Figure (2), tungstic-oxide thin films may be formed in a process utilizing delivery mechanisms 1 and 2.

The introduction by evaporation from a solid (mechanism 1) produces a solidifiable vapor species, and so no other actions are necessary to achieve deposition. The evaporated atoms may be simply transported by the jet to region R2 where they form a deposit on the substrate. The result would be analogous to that of other evaporation coating techniques in use today. In other applications, however, it may be desirable to cause these evaporated species to suffer further reactions in order to synthesize the desired depositing species.

A specific advantage of the process and apparatus of my invention is that any precursor species which has successfully been introduced as a component in mixture with the carrier gas may be acted upon further in order to synthesize a deposit-

ing species. This action may take the form of:

- 1) Chemical reaction with another species
- 2) Dissociation of the chemical species by pyrolysis at a heated solid surface
- 3) Dissociation of a similar species by absorption of radiation (photochemistry).
- 4) Dissociation due to interaction with a plasma or discharge (arc heating)
- 5) A combination of these methods acting on one or more species introduced by one or more delivery mechanisms.

This wide variety of actions is possible in my invention, precisely because the transport of the highly reactive, saturated depositing species by a jet of carrier gas serves to spatially isolate the synthesis chemical reactions from the actual condensation reaction at the substrate surface. Thus the thermodynamic and gasdynamic flow conditions (as well as other conditions, e.g. radiation intensity) governing the behavior of the chemically reacting gas mixture may be varied widely on either end of the jet in order to independently optimize both the synthesis reaction and the condensation reaction. Naturally, the flow conditions at the beginning of the jet (site of initiation of depositing species synthesis reactions) are coupled to the conditions at the surface of the substrate at the end of the jet (site of condensation reaction to form a network solid). But although this dependence is very complicated it may be controlled by altering the flow geometry, gas pressure, temperature, mixture concentration, etc. as described below.

Once the synthesis reaction is started, it may continue as the reactant species are transported in the jet. Indeed as the carrier gas expands through the nozzle, it converts its thermal energy into mechanical energy and cools. The expanding carrier gas also cools the reactants, and provides a "heat sink" for any exothermic reactions which may occur. These continuing reactions (including homogeneous nucleation) will depend on the evolving thermodynamic conditions of the flow as the gas mixture expands through the nozzle and forms the jet. The conditions are dependant on the expansion rate which is largely controlled by the nozzle geometry. (One of ordinary skill in the art reading this disclosure will perhaps have need of further background in the gas dynamics of nozzle flows. For this purpose, reference may be had to J.D. Anderson, Jr., *Modern Compressible Flow*, 1982 McGraw-Hill, New York or H.W. Liepmann and A. Roshko, *Elements of Gas-Dynamics*, 1957 J. Wiley, New York, which are specifically incorporated herein by reference.) A diverging section may be added to the nozzle (see Figure (7)) to control the expansion rate before the flow exits the nozzle to form a free jet. Indeed the addition of a diverging section can change the nucleation rate by sev-

eral orders of magnitude. (Again, for purposes of reference for those of ordinary skill in the art who may require further background in gas-phase nucleation of clusters in seeded molecular beams, the reader is referred to O. Abraham, et al, "Gasdynamics of Very Small Laval Nozzles", *Physics of Fluids* 224 (6), 1981 American Institute of Physics; and O.F. Hagena "Cluster Beams from Nozzle Sources", *Gasdynamics* vol. 4, 1974 Marcel Dekker, New York, which are specifically incorporated herein by reference.)

2. Transport of Depositing Species.

Once the synthesis step is initiated (synthesis can continue while the reactants are being transported) the transport step is achieved always in the same manner. The high speed flow of the carrier gas entrains the depositing molecules and convects them into the flow region R2 (see Figure (1)) which borders on the object to be coated. In certain respects, the flow field will be largely dominated by the behavior of the inert carrier fluid, since the reactant molecules are present in dilute concentration (of order 1 molar % or less). One can analyze the flow as if it were the just pure carrier fluid under the same flow conditions and then by examining the degree to which the molecules of the depositing species are "entrained" in the flow of the carrier gas. This becomes a question of whether the species being transported is in equilibrium with the carrier gas. As we shall see, this question of equilibrium (or disequilibrium) is also very important in determining the exact mechanism of deposition.

Differences in the mixtures flow field as compared to that of the pure carrier fluid under the same fluid dynamic conditions will be mainly due to the possible disparity in masses of the mixtures constituent molecules and also due to the energy addition or consumption caused by the synthesis reactions. If one chooses to use a carrier gas with an especially small molecular weight (e.g. hydrogen or helium) then most depositing species will have a molecular weight which is one or several orders of magnitude greater (e.g. many metal or metal-oxide radicals). The possibility of dimerization, trimerization and ultimately cluster nucleation will increase this mass disparity, and with significant clustering the distinction between considering the behavior of the depositing species as that of molecules or as aerosol particles becomes less precise. In any event, even if the depositing species is present as only about one percent of the mixtures component molecules, its mass, momentum and energy -- as distinct from that of the carrier fluid -- may be far from negligible. In fact, it was the study of the behavior of heavy molecules

in the high speed flow of a light bath which, inspired the invention of this deposition technique.

Accordingly, it will be found profitable in the case of a disparate mass mixture to exploit the similarity with aerosols when trying to model the motion of the heavy species. Even when the depositing species is distinctly molecular, rather than aerosol, the inertial effects governing its behavior can be highly significant. (One of ordinary skill in the art reading this disclosure will perhaps have need of further background in the gasdynamics of disparate mass mixtures, and in particular velocity persistence effects. For this purpose reference may be had to: J. Fernandez de la Mora, "Inertial Non-equilibrium in Strongly Decelerated Gas Mixtures of Disparate Molecular Weights", *Physical Review A* 25 (2), 1982 The American Physical Society; or J. Fernandez de la Mora, "Simplified Kinetic Treatment of Heavy Molecule Velocity Persistence Effects; Application to Species Separation", From *Rarified Gas Dynamics*, Vol. 74 of *Progress in Astronautics and Aeronautics*, 1981 American Institute of Aeronautics and Astronautics -- both of which are incorporated herein by reference.) In our high speed flow regime, the heavy depositing species can be in a state of extreme disequilibrium with the carrier fluid, so the conventional theory of continuum mechanics is not always applicable. However, since the heavy depositing species represents such a small fraction of the mixture's molecules, the mixture's flow can be treated as outlined previously: first observe or estimate from theory the flow field of the pure carrier gas, then determine the degree to which the heavy molecules "lag" behind the flow of the carrier.

The presence of the depositing species in dilute concentration will not hinder the flow of the carrier significantly, so the carrier flow field can be treated in the conventional manner. Such a treatment will result in the gasdynamic knowledge of the jet of the carrier fluid which completely depends on the following parameters:

- 1) Initial (stagnation) pressure
- 2) Initial (stagnation) temperature
- 3) Nozzle Geometry
- 4) Ratio between the initial and downstream pressures (from nozzle exit)
- 5) Gas viscosity
- 6) Ratio of the carrier gas' specific heats, one at constant pressure, the other at constant volume.

As result of my described process and apparatus, it will now be recognized that for a given choice of carrier gas and depositing species, parameters 1, 2, 3 and 4 can be independently varied, radically altering the flow field, which in turn will alter the transport and deposition.

The motion of the depositing species will depend completely on the Mach Number

(nondimensional speed) of the carrier flow field and the Stokes Number; this latter parameter will be a measure of the "lag" of the heavy depositing molecules behind the flow of the carrier fluid. Such lagging is often termed "velocity persistence" or "inertia" and describes departures from the motion of the molecules predicted by continuum mechanics. In this way, the Stokes Number represents the degree to which the heavy depositing species is in dynamical disequilibrium with the carrier bath. Thus with the knowledge of the carrier gas flow field, which is easily determined through well established theory, and an accurate estimation of the velocity lag of the depositing species in that flow field one can determine and control the transport of the depositing species.

Now the general representation of the flow velocity is the Mach Number (M), a nondimensional gasdynamic parameter which is defined as the ratio of magnitude of the flow velocity (U) to the gas' thermal speed (C)

$$(1) \quad M = U/C$$

We consider now the steady state of deposition, in which the flow regime, synthesis and deposition reactions are established, and continue unchanged until the desired, thin film thickness is achieved. In steady state, the flow field remains constant through time, and this simplifies the theoretical treatment. For the given geometry the flow field is then calculated assuming that the carrier gas is pure and employing conventional continuum mechanics. Depending on the application, the optimal flow field may be subsonic or supersonic. For any gas flowing through a nozzle at fairly large Reynolds Number, a pressure ratio across the nozzle (i.e. the quantity P_1/P_b , where P_1 is the gas pressure upstream of the nozzle, and P_b is the base pressure in the deposition chamber) of between unity (1) and approximately two (2) (for almost any gas) will correspond to subsonic flow whereas pressure ratios greater than about two (2) will cause supersonic flow. Naturally, a larger pressure ratio requires greater pumping capacity to maintain the flow. (In experiments, the flow Mach Number has ranged from one-tenth (0.1) to about unity (1).) The carrier gas used most often has been helium which has a sound speed at room temperature of about a kilometer per second. Since the distance over which the depositing species was transported was at most a few centimeters, the transport obviously happens very quickly.)

With knowledge of the carrier gas' flow field, one can begin an estimation of the Stokes Number. To reiterate, the Stokes Number is a measure of the degree to which the molecules of the depositing species "lag" behind the high speed motion of

the carrier gas molecules. For example, if a molecule to be deposited originates in a solid filament placed in region R1 of the flow field and is then evaporated off into the gas flow, it must be accelerated *from* a state in which it is essentially at rest to the speed of the surrounding gas flow. This acceleration takes a certain time, and the Stokes Number is, in a certain sense, a measure of that time.

The Stokes Number (S) is actually a ratio of two times: 1) the microscopic particle relaxation time (τ) and 2) the overall macroscopic acceleration time of the flow (t).

$$(2) \quad S = \tau/t$$

The relaxation time is the average time required for the molecules of the depositing species to achieve velocity equilibrium with the host fluid. Equilibrium in gases arises from collisions between their constituent molecules. For example if a molecule is moving at a velocity radically different from the mean velocity of all the other molecules in a gas (i.e. if it is in disequilibrium), collisions cause a transfer of energy and momentum between molecules, which serve to bring the velocity of the unusual molecule more in line with the mean flow velocity. It should be emphasized that the relaxation time is a statistical probability and only has meaning for a large number of molecules. Collisions between molecules of similar masses are very effective in transferring energy and momentum, so perhaps only one collision is necessary to relax a molecule in a gas of other molecules with equal mass. However the transfer of energy and momentum from a heavy particle to a light particle is relatively inefficient, hence many collisions are necessary to equilibrate a heavy molecule with a gas of lighter molecules. These collisions take time, of course, so the more collisions necessary, the greater the relaxation time (τ).

Naturally, there are also collisions between the molecules of the depositing species but since their concentration in mixture is so small, their number density is very small, so collisions are much less frequent. (In fact, in the absence of the carrier molecules, the densities of the depositing species would correspond to flow in the extremely rarified regime treated in hypersonic theory.) Actually the frequency of these self collisions of the depositing species will be important in determining the synthesis reaction, nucleation and, to a certain extent, the deposition rates, but for the present we are concerned with the degree to which the depositing species molecules achieve equilibration with the carrier gas. From statistical mechanics one can approximate the relaxation time (τ) through Einstein's formula:

$$(3) \quad \tau = m_d D / (k_B T)$$

where:

m_d = Molecular weight of depositing specie

5 D = Diffusion coefficient (depositing in carrier)

k_B = Boltzmann's constant

T = Absolute Temperature

The diffusion coefficient can be measured in a standard experiment or it may be estimated using the Chapman-Enskog theory. (One of ordinary skill in the art on reading this disclosure may require a greater background in gas-phase mass transport theory. For this purpose, reference may be had to: D.E. Rosner, *Introduction to Energy, Mass and Momentum Transport in Chemically Reacting Fluids*, (in press) 1984 J. Wiley - EXXON, 1984. New York --which is specifically incorporated herein by reference.) Thus, (τ) is easily calculable from known quantities.

20 The other time which appears in the definition of the Stokes Number (Equation 2) is the fluid flow's macroscopic time of acceleration (t). To determine this time, one chooses a characteristic length of the flow geometry (d) (e.g. the nozzle throat diameter) and the average flow velocity (U) over that length. One obtains (t) from the following relation:

$$(4) \quad t = d/U$$

The choice of (d) is rather subjective, and so one must carefully choose the most relevant distance. Combining Equations 2, 3 and 4 we have:

$$35 \quad (5) \quad S = m_d D U / (d k_B T)$$

or one may choose to exploit the perfect gas law to write this as:

$$40 \quad (6) \quad S = m_d D U \rho / (d m_c P)$$

where:

ρ = carrier gas density

m_c = carrier gas molecular weight

45 P = gas pressure

In an equilibrium situation, the Stokes Number is very small compared with unity, and this corresponds to the fact that in equilibrium, the molecular relaxation occurs much faster than the changes in the overall flow velocity. However, note that Equation 6 indicates that an increase in the ratio (m_d/m_c) of the depositing species to the carrier fluid's molecular weight will increase the Stokes Number. In fact, if this ratio is of order one hundred, it is possible to reach Stokes Numbers near unity even in subsonic flows. A Stokes Number near unity corresponds to conditions of extreme disequilibrium, where the inertia of the heavy

species is so large as to dominate over the viscous forces of the carrier fluid. These inertial effects cause the depositing species to become disentrained from the flow of the accelerating carrier fluid and to pursue their own independent, ballistic-like trajectories. This inertial behavior is analogous to the behavior of macroscopic aerosol particles in disequilibrium with their carrier fluid. The novelty is in noting that such effects are also observable in massive molecules. To first order such effects account for behavior of heavy species normally attributed to "pressure diffusion".

Now with a knowledge of the carrier fluid flow field and the Stokes Number one can account for the transport of the depositing species. To achieve the transport, the condensing species must be entrained in the flow of the carrier; and to maximize this entrainment one must minimize the Stokes Number. Thus for a given depositing species this would imply a choice of carrier gas with similar molecular weight. However, as we shall see in the next subsection of this document which describes the deposition step, a regime of high Stokes Number may be desirable at the end of the transport step, so in certain applications it may be highly desirable to choose a carrier gas of much lower molecular mass to that of the depositing species.

The Mach Number (i.e. flow velocity), Stokes Number, and thus the transport will depend completely on the following parameters:

- 1) Initial pressure
- 2) Initial temperature
- 3) Pressure ratio (across nozzle)
- 4) Nozzle geometry
- 5) Concentration of minority species
- 6) Mass ratio (depositing to carrier species)
- 7) Diffusion coefficient (depositing species in carrier)
- 8) Carrier gas viscosity
- 9) Specific heat ratio of carrier gas

Again, when one employs my process for a given choice of depositing species and carrier fluid, parameter 1 through 5 can be varied independantly. As one of my preferred embodiments the Nozzle Geometry should be designed as described below so that even when one is using a disparate mass mixture the depositing species is efficiently entrained in the carrier fluid during acceleration. Such a disparate mass mixture, then allows one to employ inertial effects to achieve deposition (a description of this follows shortly). This nozzle design varies with the specific chemical application and is done using the Navier-Stokes fluid mechanics mathematical model as described below. A schematic is shown in Figure (3) which is an enlargement of the throat section of the nozzle 1-1 in Figure (1) in order to better depict the upstream portion of the flow region R1 in which the synthesis reactions

occur. When a condensible species 3-2 is caused to be formed near the centerline of the flow 1-3 through the nozzle 1-1 (e.g. from evaporation off a filament 3-3 placed there), this species will begin to diffuse outward toward the solid walls 3-1 of the nozzle 1-1, but it will also experience collisions with the molecules of the flowing carrier gas 1-3 which will convect it downstream. The enclosed area depicts the region R1 populated by the condensible species 3-2 as they diffuse outward from the incipient jet's 1-7 axis while being transported downstream. Optimal circumstances (as depicted) are such that the condensible species is convected past the nozzle exit 3-4 before diffusion to the nozzle's throat's walls 3-1 can occur, so condensation on the nozzle 1-1 itself is avoided. The advantage in placing the filament 3-3 upstream from the nozzle throat is that the depositing species is accelerated along with the carrier bath, so the entrainment is enhanced. Other geometries with differing transport properties are possible.

In practice, as described below successful transport of a given species may be achieved over a wide range of flow rates (i.e. pressure ratios P_1/P_0), so this allows variation of the thermodynamic and gasdynamic conditions within this range to optimize the synthesis reactions. Observe that Equation 6 implies that increasing the carrier pressure reduces the Stokes Number and thereby increases the entrainment rate. If all else remains constant, then by increasing the pressure ratio, one will increase the flow rate, and thus the transport rate. Furthermore, by adjusting the position at which the synthesis reaction begins (e.g. by changing the placement of the filament in evaporation) and/or by changing the placement of the object to be coated, one can control the overall residence time of the depositing species in the gas-phase of the jet. This control of the residence time along with the wide latitude in setting the concentrations can be used to govern the synthesis reactions. Also one can merely change the concentrations of the reacting species in order to alter the synthesis reactions. Naturally, for a given depositing species, one is free to choose any inert carrier fluid, which choice will depend on criteria peculiar to that application. These many degrees of freedom, afford great flexibility in designing an apparatus intended to cause a particular deposition to occur. Each envisioned application will require a systematic variation of these parameters to find the optimal configuration.

The the analysis of the transport process is complicated by the very fact that the synthesis reactions may continue to occur during the transport. Consequently, as experiments have demonstrated a slight change in the apparatus' geometry can have a profound effect on the gas phase

residence time of the reactants, which, in turn, will greatly alter the products of the reaction. The addition of a diverging section (see Figure (7)) on the nozzle will afford control over the gas expansion rate, which is not available in the case of the free jet (as depicted in Figure (1)). Such a section has been shown to change the nucleation rate of a seeded species by many orders of magnitude. Thus, a diverging section could provide another means of control over the synthesis reaction and the transport rates.

Unfortunately, it has been recognized in gas-dynamics that theoretical and experimental determinations of the degree of clustering are very difficult. But often, if clustering is extensive, a particulate structure will persist in the morphology of the deposit. Whether this is desirable or not will depend on the given application (it would be in, say, the deposition of a catalytic material, since that catalysis may benefit from the increased surface area of a catalytic material with a particulate structure).

The important point is that this phenomenon may be controlled to a large degree. (A treatment of the means of control is given in below.) Thus, the synthesis and transport steps -- which as noted; can occur simultaneously -- are achieved. They are the preliminary steps in the overall deposition reaction.

3) Deposition and Film Growth.

Once the depositing species is synthesized and convected into the region R2 of the flow field, its molecules migrate to the substrate's surface alternately or in relative combination through one of the following two mechanisms.

1) Molecular Diffusion

2) Inertial Impaction

Which mechanism dominates in an actual deposition will depend on the Stokes Number of the flow. As the gas mixture expands through the nozzle it forms a jet. When this jet encounters the object to be coated, which has been placed in the region R2 of the flow field (Figure (1)), the gas flow will decelerate. There arises again a situation of changing flow velocity, and the possibility of "velocity persistence" for the depositing species if there is a significant mass disparity. This possibility will be specified by the Stokes Number.

The object to be coated (i.e. the substrate 1-10 of Figure (1)) may be a "bluff body" or it may have a "sharp" edge. (Including "wedges", "cones" and "cylinders" of small diameter compared to the jet diameter.) The flow past such generally characterized bodies can be calculated on the basis of the documentation which is found in many texts on the theory of fluid dynamics for both the subsonic and

supersonic cases. (One of ordinary skill in the art on reading this disclosure perhaps requires further background in the theory of fluid flow past solid bodies. For this purpose, reference may be had to: G.K. Batchelor, *An Introduction to Fluid Dynamics*, 1967 Cambridge University Press, Great Britain -- which is specifically incorporated herein by reference.) The case of subsonic flow impinging on a bluff body will be treated first, and then the cases of the sharp edge and supersonic flow.

The jet impingement on a blunt body (see Figure (8)) can be likened to the so called "stagnation point" flow and, in fact, the deposition will be concentrated around the stagnation point 9-4. If the object 9-1 has a breadth which is an order of magnitude larger than the jet 1-7 diameter -- which is of course comparable to the nozzle 1-1 orifice diameter (see Figure (1)) -- then it should be considered as a bluff planar body with breadth which is essentially infinitely large in comparison to the jet 1-7 width. Even if the object is not actually planar, the theory is still applicable as long as its shape has fairly small curvature in comparison to the jet's 1-7 width.

The jet 1-7 (depicted as streamlines) transports the depositing species near the surface of the substrate 9-1. When the Stokes Number is sufficiently small, that is if the jet's 1-7 speed is fairly slow or if the carrier fluid has a molecular weight comparable to that of the depositing species or if the pressure is high enough (see Equation 6), then continuum mechanics will reign; the mixture can be considered in equilibrium; and diffusion will dominate the deposition process. The jet 1-7 will convect the condensing species 9-2 near the substrate's 9-1 surface, and because the flow speed will then have slowed, there will be sufficient time for molecular diffusion to this surface. Since the depositing 9-2 species can condense on the surface, the substrate 9-1 will "capture" this species from the gas-phase and a solid deposit 9-3 will form. The substrate 9-1 acts like a mass "sink" for the condensing species 9-2 -- at least in the sense that said species is a gas-phase species. But since the depositing species is removed from the gas-phase, its concentration in the gas mixture is depleted in the portion of the flow field abutting the substrate 9-1 surface (this flow region is termed R2 in Figure (1)). This, of course, causes a spatial concentration gradient which drives further gas-phase diffusion in the mixture of the depositing species toward the substrate 9-1 surface. This process continues as the gas flows along the "infinite" breadth of the "bluff body" substrate 9-1 and essentially all of the depositing species 9-2 condenses from the gas-phase. Thus, nearly all of the synthesized depositing species 9-2 condenses into thin film 9-3 form. The carrier gas exits the de-

position chamber downstream, and convects along with it any of the reactant species remaining in the gas-phase which were not fully consumed in the synthesis reactions producing the condensable species. However, if the carrier gas is recirculated via the recirculation loop 1-9 (see Figure (1)), then these reactant species are also recycled and they are reintroduced in the flow through the nozzle 1-1 and into the flow region R1 where they again have a chance of being consumed in the continuing synthesis reactions. So even when a specific preferred embodiment involves the fabrication of a thin film using a deposition process which includes a chemical synthesis reaction step that is only fractionally efficient in converting the gas-phase reaction precursors into the desired depositing species, there is still high efficiency in the use of materials because the unreacted gas-phase species can easily be recovered and recycled. Thus my invention of method and apparatus for depositing thin films is highly efficient in that it converts nearly all of the initial raw chemicals into the desired thin film material.

The alternate deposition mechanism occurs when the Stokes Number of the flow is large, but even when inertial impaction is the dominant mechanism, diffusion still insures that all of the depositing species condenses -- even that small portion of the depositing species' molecular population with insufficient velocity to be inertially impacted. The treatment of inertial impaction will begin with a discussion of the most important aspect of this phenomenon as it affects the condensation reaction: the unusually high kinetic energies of the depositing species molecules in the case where there is significant disparity in the molecular masses (i.e. m_d/m_c is large), and the flow speed is fast. This large energy can affect the chemical reactions at the substrate surface as the heavy species collides with the atoms of the surface. (One of ordinary skill in the art on reading this disclosure perhaps require further background in the field of surface impact chemistry. For this purpose, reference may be had to: M.S. Connolly, et al, "Activation of Chemical Reaction by Impact of Molecules on a Surface", *Journal of Physical Chemistry* 85 (3), 1981 American Chemical Society ; or E. Kolodney, et al, "Collision Induced Dissociation of Molecular Iodine on Sapphire", *Journal of Chemical Physics* 79 (9), 1983 American Institute of Physics -- which are both specifically incorporated herein by reference.) Consider the expansion of the carrier gas. Before the expansion begins, the carrier gas has enthalpy (H) given by:

$$(7) \quad H = k_B T_1 \gamma / (\gamma - 1)$$

where:

γ = specific heat ratio of carrier gas

k_B = Boltzmann's constant

T_1 = Initial (stagnation) absolute temperature

5 Since the factor $[\gamma/(\gamma - 1)]$ depends on the gas, but is always of order unity, the enthalpy is always of order $(k_B T_1)$. If the expansion occurs into a region that has been largely evacuated, this enthalpy will be mostly converted to kinetic energy of the light gas flow (K).

$$(8) \quad K = (m_c/2)U^2 = H$$

where:

15 m_c = molecular weight of carrier

U = Flow velocity

Provided the expansion has proceeded at a rate slow enough so that the Stokes Number has remained low, the heavy molecules of the depositing species dispersed in the flow will be efficiently entrained and will therefore share this velocity (U) and have their own kinetic energy, (K_d) which is defined as:

$$25 \quad (9) \quad K_d = (m_d/2)U^2 = (m_d/m_c)H$$

where:

m_d = molecular mass of depositing species

As previously observed, the mass ratio can be of order 100, so the kinetic energy of the heavy species can be unusually high, much greater than its initial thermal energy. Even when the flow remains subsonic, such a heavy species may have a kinetic energy of several electron volts per molecule, provided the Mach Number is high (although less than 1) and the heavy molecules have been adequately entrained. When this mechanical energy of the depositing species is very large, its initial thermal energy may be an insignificant fraction of its total energy so the molecules can be highly monoenergetic. (One of ordinary skill in the art on reading this disclosure may require further background in the flow energies of nozzle beams -- particularly in the energy distribution among the population of heavy molecules seeded in the flow of a light gas. For this purpose, reference may be had to: J.B. Anderson, "Molecular Beams from Nozzle Sources", *Gasdynamics*, Vol. 4, 1974 Marcel Dekker, New York.) High velocity also means very high momentum for the heavy molecules; from this arises the inertial effects.

An important feature of the stagnation point is that the continuum flow actually has zero flow velocity there. Naturally, the gas cannot have a velocity perpendicular to the flat plate, directly at the flat plate, but also the gas' finite viscosity insures that there is no lateral flow of gas in the layer of fluid immediately next to the plate. This is the so

called "no slip condition" for Newtonian fluids. These features imply that the flow in the immediate region of the stagnation point is very slow. Now as the depositing species is accelerated through the nozzle in high Mach Number flow, it will have a velocity comparable to the speed of sound of the carrier fluid which is of order one kilometer per second for light gases like helium or hydrogen at room temperature. When the jet then encounters the stagnation point region, the flow must decelerate to near zero velocity (zero at the solid surface). Obviously, regimes of extremely high deceleration can be set up in the flow field. If the Stokes Number is then large enough (since it is proportional to the acceleration), the viscous forces of the carrier fluid may not be adequately large to maintain the heavy molecules in the continuum regime. They become disentrained from the carrier's continuum flow and pursue independent trajectories, encountering the plate at finite velocities, where they impact to form the deposit. The behavior is analagous to the what has been called inertial impaction of aerosol particles. (One of ordinary skill in the art may on reading this disclosure may require further background in the field of aerosol physics. For this purpose, reference may be had to: D.T. Shaw *Recent Developments in Aerosol Science*, 1978 J. Wiley, New York -- which is incorporated herein specifically by reference.)

The deposition process should be viewed as a heterogeneous chemical reaction. As previously observed, when the depositing species is inertially impacted, its large amount of kinetic energy can play an important role in this condensation reaction. Indeed with supersonic flow velocities, a stable species can be caused to dissociate solely through the collision energy of impaction. A change in flow velocity can alter the energy of impaction, which in turn markedly affects the heterogeneous reaction and the qualities of the thin film thereby produced. As stated previously, changes in the flow velocity and in the concentration (partial pressure) of the reactant species can affect the synthesis reactions; however, if one assumes that the identity of the depositing species remains constant, these parameters (through their governance of the rates at which the depositing species molecules are introduced at the substrate surface and their kinetic energies) as well as the substrate temperature are the main variables governing the condensation chemical reaction. These variables can, of course, be controlled, and there is great latitude in setting them so it is possible that many useful deposition reactions, each of which would proceed optimally at specific conditions within this wide range of possible conditions, could be induced to occur.

This theory can be extended to the case of sharp edged substrates. For a "wedge" or "cone"

oriented so that its sharp edge is directed into the flow of the jet 1-7, (see Figure (9)) the stagnation point 10-4 will occur on that edge (even a very sharp edge is blunt on a molecular scale). Any inertial impaction will occur on or near the sharp edge only, however viscosity will slow the flow past the wedge's sides, so the deposition due to molecular diffusion will occur on these sides. The relative importance of each of these mechanisms will depend on the flow speed, identity of the carrier and depositing species, and the specific flow geometry.

In case of a "cylinder" or "sphere" (see Figure (10)) with diameter smaller than the diameter of the jet 1-7, impaction will be the only mechanism at high speed, and will occur on the upstream surface where again there is a stagnation point 11-4; whereas at low speed diffusion will allow condensation on areas of the substrate 11-1 surfaces further downstream. However, since the substrate is of comparable size to the jet 1-7 width, diffusion will not insure that all of the depositing species molecules 11-2 will encounter the substrate 11-1 and deposit. Some molecules 11-2 will "miss" and be convected downstream.

These concepts apply as well to the supersonic case. The highest heavy species kinetic energies can be achieved in this case, which can be of order ten electron volts per molecule. Such high energies are not possible with conventional Chemical Vapor Deposition, or Evaporative Coating Processes and they are achieved in a low vacuum environment in contrast to the high vacuums required of Sputtering, conventional Evaporative Coating and other deposition technologies. In the supersonic case, one must be aware that detached shocks will form before blunt objects placed in region R2 (see Figure (1)) while attached shocks form on sharp edged objects. In the latter case, a heavy depositing species will be impacted with highest energy at the point of the shock attachment (the sharp edge itself), otherwise the flow is decelerated through the shock so the depositing species will lose some of its high free stream velocity. In the case of the detached shock, the best choice of characteristic length (d) for calculating the Stokes Number (see Equations 4 and 6) of the flow is the shock to object distance.

In summary, my preferred deposition process embodies the disclosed three steps:

- 1) Synthesis of depositing species
- 2) Transport of said species
- 3) Deposition and film growth

The deposition process may be viewed as one long steady state, gas-phase chemical reaction which begins with the reaction that synthesizes the depositing species, and ends as that species forms a deposit in the condensation reaction. The latter reaction is heterogeneous and results in the forma-

tion of a network solid with chemical bonding to the substrate surface. The means of controlling the evolving chemical reactions is now described.

A benefit of using the carrier fluid mechanism of transport is that dominant flow of the inert carrier serves to purge the apparatus of gas phase impurities; thus control of the deposition chamber atmosphere is achieved. Specifically, before deposition begins, the flow of the pure carrier fluid is established through the apparatus. Any unwanted species introduced into the interior of the vacuum system (while it may have been open to the ambient atmosphere) will be entrained in the carrier flow and convected out. Provided there are no leaks in the apparatus, the flow will be of the pure carrier fluid. (The flow is presumed to originate from a storage chamber charged with a supply of highly purified inert gas.) Next, the flow of the reactants is established and the deposition reaction initiated. In this manner, the identity of the species involved in the synthesis and deposition reactants is controlled.

Even if there are small leaks in the deposition chamber's walls, the carrier gas flows between the substrate and these walls and presents somewhat of a dynamic barrier which isolates the deposition reaction from these possible sources of impurities. In other words, the fast carrier gas flow convects the atmospheric impurities (or impurities due to outgassing of the chamber's solid surfaces) downstream before there is time for them to diffuse across the flow to the substrate. (Naturally, this effect will be strongly dependent on the size and position of the leak in the system.) Furthermore, it is conceivable that the entire deposition could occur in a system with carrier gas pressure always higher than atmospheric pressure. Thus, any leaks would leak out. There are no fundamental theoretical reasons which would preclude this concept, however the enormous pumps needed to operate at such high pressures -- and therefore such high mass flux -- have not been available for use in a laboratory demonstration. (Naturally, in practice the economic costs of operating such pumps must be balanced against the benefits of a high pressure process.) In any event, the predominant flow of inert carrier serves to purge the apparatus initially and to maintain a controlled atmosphere for deposition. Thus the only species present are the inert carrier and the reactant species. Their relative concentrations can be varied provided the total number density of the reactants remains small compared to that of the carrier. Depending on the degree to which they are in equilibrium with the carrier fluid, the reactants partial pressures and temperatures will be determined by the pressure and temperature of the carrier gas, which depend throughout the flow field on their initial values before the

expansion (P_i and T_i), on the nozzle's (variable) geometry, and on the flow pressure ratio (P_i/P_b , where P_b is the background pressure in the deposition chamber). These parameters will control the velocity, pressure and temperature fields throughout the flow field (assuming negligible energy addition or consumption due to the synthesis reactions) and thus these latter thermodynamic conditions which govern the chemistry of the process can be manipulated to optimize the envisioned synthesis and condensation reactions. Anomalies due to disequilibrium in the gas mixture, or those caused by non-negligible energy transfer to or from the flow, can be estimated using the Stokes Number, along with other standard techniques employed in the theory of mass, and energy transport in chemically reacting fluid flows.

In a flowing chemically reacting fluid under steady state conditions, the reactions occur over distance; the time of the reaction is the time needed for the flow to convect the reactants over the distance and through the reaction. Thus the flow field not only determines the energetics of the reaction; the velocity field and apparatus' geometry (e.g. the nozzle to substrate distance, or length of the free jet.) will also determine the residence time of the reactant species in the gas-phase, and therefore the time of the reaction. More precisely, the concentration, self collision time, and residence time of the reactants will specify their probability of interaction. This probability along with the energy of this molecular interaction will determine the synthesis reactions. Both probability and energy can be largely controlled in this system through the following macroscopic variables.

- 1) Choice of carrier gas
- 2) Apparatus Geometry
- 3) Mixture concentration
- 4) Mixture initial pressure
- 5) Mixture initial temperature
- 6) Base pressure in deposition chamber.

Through these variables the system affords control over the synthesis reaction. The optimal conditions will depend on each application.

The deposition reaction can also be largely controlled by setting the substrate temperature, and the energy of the depositing molecules. By controlling the substrate temperature, one can control the thermal "history" of the thin film solid being formed. The rate of quench is extremely important in determining the properties of the product solid phase material. When the flowing carrier fluid and depositing species are in equilibrium, the energy of the depositing molecules as they encounter the substrate surface will be determined by the flow temperature, but in the case of extreme disequilibrium under which inertial impaction can occur, the depositing molecules may encounter the substrate

with very large translational energy (as discussed previously), which will, of course, affect the deposition reaction.

As previously stated, the degree of disequilibrium can be represented by the Stokes Number. To calculate precisely the distance (d) over which the deceleration of the jet occurs before impaction -- and which (d) appears in the Equation (6), defining the Stokes Number -- one must solve the Navier - Stokes Equations governing the flow. This is a relatively complicated task. However, for many geometries one could borrow from the developed theory of aerosol impactor design. (One of ordinary skill in the art on reading this disclosure may have need of further background in the field of aerosol impactors. For this purpose reference can be made to: K. Willeke, et al, "The Influence of Flow Entry and Collecting Surface on the Performance of Inertial Impactors", *Journal of Colloid and Interface Science* 53 (1), 1983 American Institute of Physics; and V.A. Marple, et al, "Impactor Design", *Atmospheric Environment* 10, 1976 Pergamon Press, Great Britain -- which are both incorporated herein specifically by reference). Marple, et al, note that (d) should be equated with the hydraulic diameter of the free jet. (For a circular orifice, the hydraulic diameter is merely the orifice diameter, while for a rectangular orifice, the hydraulic diameter is one half of the orifice width.) This conclusion is only valid at high Reynolds Number flow and only if there is enough distance between the nozzle exit and the substrate for a subsonic jet to develop. The latter condition is satisfied provided that the distance is greater than the nozzle orifice's characteristic width. Following the development in Marple's work one would employ the free jet velocity (U) as the velocity in Equation (6). (The velocity of the free jet can be calculated using the standard theory of continuum mechanics, assuming that the gas is only composed of the pure carrier fluid.) Here one must assume that a heavy species shares this velocity with the light gas, or in other words does not "lag".

For the heavy species to be in equilibrium within the free jet of light carrier, they must be efficiently entrained in the accelerating flow of the carrier through the nozzle. To insure this the nozzle must be designed to minimize the Stokes Number in the accelerating part of the flow. Rather than solving the complete Navier-Stokes Equations of the accelerating flow (as Willeke, et al and Marple, et al, have done) one can begin with the standard one dimensional approximation of the carrier flow through the nozzle. (Again see J.D. Anderson, Jr., *Modern Compressible Flow*, as cited previously.) One approximates the flow velocity as the component of the velocity along the axis of the nozzle, calling this the X - coordinate, while neglecting the

other components. The flow velocity (U) is a scalar in this approximation and for a given mass flux will completely depend on the nozzle geometry. Specifically, the flow velocity (U) at a position (X) will be inversely proportional to the cross sectional area (A) of the nozzle duct through which the flow must pass at that position. This is a simple consequence of mass conservation and so (U) as a function of (X) will depend on (A) as a function of (X) (i.e. the velocity depends on the nozzle geometry). One can define a local Stokes Number:

$$(10) \quad S \equiv \tau(dU/dX)$$

where:

dU/dX = the spatial gradient of U.

And by requiring the accelerating part of the flow field to be one in which dU/dX is minimized, the Stokes Number is also minimized. This will, in turn, establish (A) as a function of (X) thereby specifying the nozzle's geometry. (It must be remembered that only if $S \ll 1$, will the depositing species be in equilibrium and therefore adequately entrained.) In practice, one must compromise between minimizing the acceleration Stokes Number, and maximizing the deceleration Stokes Number to achieve inertial impaction of a species. Each application will have its own specific requirements. Of course, these requirements must also be balanced against optimizing the flow conditions to achieve proper synthesis of the depositing species. All of these variables will depend on the desired application.

In addition, each application will dictate the choice of nozzle geometry, and choice of substrate shape and material. All experimental demonstrations were performed with a conical nozzle, but for coating a broad area, a rectangular nozzle, (with one long dimension) may be employed. To coat a large area (see Figure (11)), the substrate 12-1 may be moved through the jet 1-7. Although the condensation of the depositing species 12-2 is concentrated at the stagnation point 12-4, this point (or line in the case of a rectangular nozzle) is moved across the substrate's 12-1 surface, so that the deposition also occurs across the entire surface. The rate of motion will determine the thickness and evenness (discounting edge effects) of the thin film deposit 12-3 so produced.

In practice, the substrates may be coated in a "batch" mode (see Figure (12)) in which the deposition chamber is "charged" with many individual substrates 13-2, before it is sealed from the atmosphere, and then a mechanism 13-1 positions each individual substrate 13-2 under the jet 1-7 to receive its thin film coating 13-3 as the depositing species 13-4 is convected to it and condenses on it. Alternately, for rolled or coiled stock as substrate material, the deposition may occur in a "semi-

continuous" mode (see Figure(13)), in which the deposition chamber is charged with a "spool" 14-2 of substrate material 14-1. This material 14-1 is continuously "unwound" and passed through the jet 1-7, and wound onto another "spool" 14-6 positioned to receive it. The substrate material 14-1 receives its thin film deposit 14-4 at the stagnation point 14-5 where the jet 1-7 impinges on it. At the stagnation point 14-5, the depositing species condenses. The final product is a roll or coil of coated material. The entire apparatus depicted in Figure-(13) is contained within the deposition chamber 1-2 of Figure (1) (not depicted here), and is substituted for the generalized substrate 1-10 of Figure (1).

True continuous deposition could be achieved if the deposition chamber were open to the atmosphere. This would require maintenance of the pressure in this chamber at slightly above the ambient pressure so that some carrier gas could flow out the open ports and insure that no atmospheric species could diffuse inward. A gas gating mechanism could maintain the control of the chamber atmosphere. Of course, if the deposition chamber is at about one atmosphere pressure, the carrier gas initial pressure must be comparatively higher. The substrates would then be placed into the deposition chamber through the gas gate, and removed through another. In practice, these added complications and cost of the lost carrier gas, as well as the degree of control needed over the deposition atmosphere, must be balanced against the need for continuous operation.

An alternate embodiment, which may be preferred, in say, powdered metallurgy applications is the mode of deposition depicted in Figure (15). The rotating drum 15-1 is contained within the deposition chamber 1-2 (not depicted) of the general apparatus in Figure (1). The drum 15-1 is substituted for the general substrate 1-10 in Figure (1). As the drum 15-1 rotates, the portion of its surface aligned into the jet 1-7 changes, so the depositing species 15-2 condensing at the stagnation point 15-3 begin to coat the rotating drum's 15-1 surface with a thin film 15-4. At another point on the drum's 15-1 surface, is aligned the scraper 15-5, which scrapes the thin film deposit 15-4 off the rotating drum 15-1. The powder 15-6 thus formed is collected in the hopper 15-7. Also depicted are mechanisms 15-8 for heating and cooling the rotating drum's 15-1 surface in order to facilitate the deposition and powdering processes. After the hopper 15-7 is filled with powder, the deposition is complete and the deposition chamber is opened to remove the product hopper 15-7 of powder 15-6. This technique is highly useful for the controlled atmosphere evaporation and condensation of materials needed for production of ultra pure powders of the so-called "super alloys", which are later

compacted into very critical parts such as helicopter rotor hubs, jet engine components, etc. Furthermore, the operation of my apparatus at the fairly high pressures that are allowable, would also facilitate merging the apparatus onto other high pressure devices for the controlled atmosphere handling and casting of powdered materials.

In an alternate embodiment similar to the alternate embodiment of Figure(14), which would be the preferred embodiment for the production of sheet or ribbon material by removing the product thin film deposit from the substrate, a rotating drum 16-1 (see Figure (15)) is placed in the deposition chamber 1-2 (not depicted, see Figure (1)) in place of the substrate 1-10. The jet 1-7, carrying the depositing species 16-2, impinges on the drum 16-1, and the depositing species 16-2 condenses in the stagnation point region 16-3. As the drum 16-1 rotates its surface through the stagnation point 16-3, a thin film deposit 16-4 forms and coats the surface. At another point on the drum's 16-1 surface, a knife 16-5 is positioned to peel the thin film deposit 16-4 off the surface. The product ribbon or sheet material 16-7 is pulled off the surface with the mechanism 16-6. Elements 16-8 for heating and cooling the drum 16-1 surface to facilitate the deposition and peeling processes are depicted. An apparatus, such as the one depicted in Figure (15) would be highly useful for the production of thin metal foils, often used in electronics applications. Since the drum 16-1 can be maintained at high or low temperatures, high temperature phases of metal alloys may be condensed and quenched into metastable phases at room temperature. In this manner the so called amorphous metals may be produced. The device depicted in Figure (15), in fact, appears similar in certain respects to other rotating drum devices used to produce amorphous metal ribbons, but these devices quench the metal from a melt, whereas my method involves quenching from the vapor phase.

Two rotating drum devices are depicted in Figures (14) and (15), and are used in preferred embodiments designed specifically for the production of powdered materials and ribbon materials. These results could be obtained equally well with devices employing other "continuously" moving surfaces, say with a revolving disk, or a belt on spindles. Such simple alterations on the theme of continuous motion of a surface are each not depicted in a separate Figure, but rather are considered as depicted in Figures (14) and (15).

Description of Further Specific Examples

Several experiments, which are specific examples of my invention were performed to demonstrate the concept of gas jet deposition. The ex-

perimental apparatus is depicted in Figure (16), whereas the exact dimensions of the conical nozzles' geometries appear in Figure (17). The carrier gas, and in certain instances dilute concentrations of admixed reactant species, enters the apparatus at 17-1. Subsequently it flows through a needle valve 17-2, which controls the mass flux and then the flow is "choked" through a small orifice 17-4 (0.2 mm in diameter). The pressure upstream is measured at 17-3. A measurement of the pressure (P_u) upstream of the small orifice, is also an indirect measure of the mass flux, because the flow through the small orifice is maintained supersonic, and then the mass flux is given by:

$$(11) \quad m = [2/(\gamma + 1)]^{1/(\gamma - 1)} (\pi d_{so}^2 P_u / 4) \sqrt{[\rho / (R_i T_u)]}$$

where:

γ = Specific heat ratio

d_{so} = Small orifice diameter

P_u = Pressure upstream (before expansion)

T_u = Temperature upstream

R_i = Ideal gas constant

In this case, the upstream temperature (T_u) could be assumed room temperature. For a given gas and orifice, the mass flux is therefore dependent only on the upstream pressure (P_u). In experiments, the mass flux was approximately 5 milligrams per second.

After entering the nozzle 17-10 the gas flow over a tungsten filament 17-9 (wire, 0.2 mm in diameter, approx. 1 mm long) which is placed transverse to the flow, centered on the axis of the nozzle, and set within one nozzle diameter ($d_n = 2.0\text{mm}$) of the entrance to the nozzle throat section (see Figure (17)). This filament 17-9 is heated resistively, and is the source of the depositing species. The gas entrains these species, expands through the nozzle throat forming a jet that enters the deposition chamber 17-8 with speed (U) and finally impacts on a glass plate 17-11, which is positioned several nozzle diameters downstream of the nozzle exit. The flow from the deposition chamber 17-8 is removed by a mechanical pump positioned at 17-15 at the rate of 160 liters per minute.

The pressure upstream of the nozzle 17-10 could be measured at 17-7, whereas the base pressure in the deposition chamber 17-8 was measured at 17-13. A throttling valve 17-14 permits regulation of the jet Mach Number, which is calculated assuming an isentropic expansion (a good approximation at high Reynolds Number), by the following Equation:

$$(12) \quad M = \sqrt{\frac{2}{\gamma - 1}} \left[\frac{P_u}{P_b} \left(\frac{1}{1 + \gamma/2} \right) - 1 \right]^{1/2}$$

where:

P_i = Initial pressure upstream of nozzle

P_b = Base pressure in deposition chamber

All pressures were measured with either oil or mercury manometers, while the tungsten filament 17-9 temperature (T_i) was measured using an optical pyrometer 17-6

The Reynolds Number of the jet can be calculated from the mass flux, given in Equation (11), since conservation of mass through the entire system (in steady state) requires:

$$(13) \quad m = \pi \rho U d_n^2 / 4$$

where:

ρ = carrier gas density

d_n = Nozzle diameter

U = Jet velocity

The definition of the Reynolds Number (R) of the jet is:

$$(14) \quad R = \rho U d_n / \mu$$

where:

μ = carrier gas viscosity

Upon substitution of (13) into (14),

$$(15) \quad R = 4m / (\pi \mu d_n)$$

During operation the Reynold's Number was of order 100, which is actually not entirely large enough to satisfy the isentropic assumption behind the Mach Number calculation (Equation (12)). However, short of a numerical analysis, Equation 12 is the only means of estimating the Mach Number, and it should be fairly accurate at ($R \sim 100$).

These Equations for the Mach Number (M) (Equation 12) and the Reynolds Number (R) (eq. 14) are only valid for subsonic flow, and they neglect any energy addition by the hot filament. Also the specific heat ratio (γ) of the carrier gas only is used which neglects the presence of any reactants in mixture. Still, these Equations should yield highly accurate estimates of the basic properties of the flow field -- within their range of validity.

The apparatus of Figure (16) was used (with nozzle of geometry no.1, in Figure (17)) to deposit three species for three separate demonstrations of the technique.

Experiment (1): A mixture of (0.5 molar %) silane in helium was flowed through the system. The upstream flow was maintained at pressure ($P_u \sim 400$ torr), while the filament was heated to temperature ($T_i \sim 2400$ C). At this temperature the silane decomposed at the filament into various condensing silicon-hydride radicals and a deposit formed on the glass slide. Deposition occurred over a fairly wide range of Mach Number ($0.4 < M < 1$). The

initial pressure (P_i) -- pressure at the filament -- before expansion was of order 1 torr, while the base pressure (P_b) in the deposition chamber was correspondingly less, as the pressure ratio ranged over: ($1.3 < P_i/P_b < 2$).

Since the molecular mass ratio of silane to helium is only about eight ($m_d/m_c \sim 8$), the dominant mechanism of deposition was surely diffusion, at these subsonic flow velocities ($M < 1$). The large pump needed to induce supersonic flow through this geometry was not available.

A nozzle with similar geometry, except that it had four times the throat length (see no. 2, Figure (17)) was also tested. In this case, viscosity slowed the flow considerably and increased the residence time of the condensible species in the gas-phase. Significant nucleation of gas-phase clusters resulted and a particulate nature persisted in the morphology of the deposit. Indeed, a small change in apparatus geometry can have significant consequence for the quality of the deposit.

An infra-red spectral analysis of the amorphous hydrogenated silicon deposit, formed by the first means showed no trace of atmospheric impurities, thus demonstrating that the atmosphere during deposition was controlled.

Contaminant-free samples of hydrogenated amorphous-silicon in thin film form can display semiconducting properties. Furthermore, these materials may be doped to form homojunctions. Dopants often used are boron and phosphorus. In my method, the doping of the hydrogenated amorphous silicon can be achieved simply by premixing small concentrations (compared to the concentration of silane) of dopant bearing gases (e.g. phosphene or diborene) into the flowing gas mixture of silane and the inert carrier gas. These dopant bearing species will dissociate at the hot surface of the filament just as the silane does, and the dopants bearing radicals will then condense along with the silane and be incorporated in the amorphous-silicon solid. Such is one example of usefulness of the reactant introduction mechanism 1 depicted by Figure (4), when it is being employed to introduce several differing reactant species.

Research has been reported in the literature, in which amorphous-silicon thin film materials alloyed with fluorine have been deposited in a plasma discharge apparatus from the gas-phase species, silicon-tetrafluoride. These materials display semiconducting properties as well. Silicon-tetrafluoride may be deposited in my apparatus, as well, in a process exactly as above, except that (SiF_4) is substituted for (SiH_4).

Experiment (2): A small amount (~ 1 molar%) of oxygen in helium was flowed through the system from an upstream pressure ($P_u \sim 400$ torr). The tungsten filament was maintained at a temperature

($T_f \sim 1400$ C) at which surface oxidation occurs. The flow of oxygen oxidized the surface of the tungsten, and the oxide evaporated from the filament, was entrained in the helium flow, and formed a deposit. Experiments were performed over a wide range of Mach Number ($0.1 < M < 1.0$) and therefore over a wide range of pressure ratios ($1 < P_i/P_b < 2$) to study the effect of inertia on the deposition. The pressures throughout the nozzle system were always of order 1 torr. At low velocity, the deposits were broad, implying that the tungstic-oxide molecules had time to diffuse radially in the jet. At high velocity, however, the opposite was true; the molecules were inertially impacted and concentrated near the stagnation point.

Thus is demonstrated a fairly general method of depositing metal-oxide thin film coatings (such as with the apparatus of Figure (2)). Of course, such insulating thin film layers made from metal-oxides (e.g. aluminum-oxide, or magnesium-oxide) are highly useful as parts of electronic devices. Certain oxides can have useful conducting properties as well (e.g. ITO, MnSnO_4 or SnO_2 (Sb doped)).

Silicon-oxide thin films are also used as constituents in electronic devices. This species can be codeposited with glass forming dopants or crystal forming dopant (depending on the final application). One method would be to premix silane gas into the stream of inert carrier gas upstream of the nozzle (introductory method 1, see Figure (4)). Dopant bearing species (e.g. diborene) could also be premixed in the inert carrier-silane mixture in the concentration chosen so that the thin film deposit has the desired dopant concentration. In flow region R1, oxygen can be introduced via a separate thin tube (delivery mechanism 3, see Figure (6)). The silane and dopant bearing species will oxidize and the resulting silicon-oxide and small concentrations of dopant-oxide (along with residual hydrogen atoms) will condense to form a deposit at the stagnation point on the substrate. Subsequent annealing can be employed to drive off any unwanted hydrogen. An alternate mechanism involves the evaporation of silicon atoms from solid silicon (delivery mechanism 2, see Figure(5)) into the inert carrier into which oxygen molecules have previously been seeded (delivery mechanism 1 see Figure-(4)). This process of silicon-oxide deposition is similar to the aluminum-oxide deposition depicted in Figure (2). The process will be useful in the coating of glass optical fibers, and can have other applications in the deposition of useful glass thin films.

It is recognized that metal-oxides coating are also useful for their effectiveness in providing chemical protection for the supporting substrate material at elevated temperatures. Powdered metal-

oxide also can be useful in ceramics.

In alternate applications, other species (e.g. nitrogen, chlorine) may be substituted as the gas-phase oxidizing species premixed in the flow of the inert carrier, which oxidizes the heated metal. For example, titanium may be the evaporated metal atoms which oxidize with nitrogen molecules admixed in the inert gas flow. In this manner titanium-nitride coatings could be formed on substrate surfaces. Titanium-nitride thin films are valued for their extreme hardness, and so if the substrate were, say, a cutting tool, then the titanium-nitride deposit would serve as a tool coating material.

In other specific applications involving the production of metal-oxide deposits, rather than evaporating the metal atoms from a pure solid metal sample (the reactant species introduction mechanism 2 depicted in Figure (5)), the metal atoms would first be introduced as part of a chemical species (e.g. a metal-carbonyl) which has a fairly high vapor pressure at normal (i.e. around room) temperatures. Thus, such a species could easily be premixed in the inert carrier fluid (introduction mechanism 1 depicted in Figure (4)), while the oxidizing species would be introduced via a thin tube into the reaction region R1 (see Figure (1)) of the flow field (delivery mechanism 3 depicted in Figure (6)). In this manner, the oxidation reaction would occur in the flow region R1 thus producing a condensible metal-oxide radical to be deposited on the prepared substrate in the usual manner.

Experiment (3): Starting from upstream pressure ($P_u \sim 400$ torr), pure helium was flowed through the system, and over a gold foil that was wrapped around the tungsten filament. The filament was heated to temperatures at which gold atoms evaporated; these were transported by the jet, and deposited. Again deposition could be induced to proceed over a wide range of Mach Number ($0.1 < M < 1$). Again the initial and base pressures were of order 1 torr. Thus is demonstrated a general method for the deposition of thin solid metal films. Since the metal atoms are introduced into the gas-phase by delivery mechanism 2 (depicted in Figure (5)), the metal material in the flow region R1 (see Figure (1)) is heated to elevated temperatures, yet the substrate in region R2 can remain cool. This would allow the fabrication of solid metal thin film coatings on materials (e.g. plastic, paper, etc.) which cannot sustain high temperatures. Such a metal film could have application as a conducting layer in an electronic device. Also, catalyst materials (e.g. platinum) can be deposited in thin film form in a like manner.

The evaporative coating of metals could be employed in conjunction with the apparatus depicted in Figure (15) to produce metal foils. The

high quench rates affordable by my method makes possible the condensation and production of amorphous metal ribbons, which materials can have unusually high strength due to their lack of the line defects of a crystal lattice.

Several metals can be evaporated simultaneously, from several pure metal solid metal samples, each placed and heated in the region R1 of the flow field (multiple use of delivery mechanism 2, see Figures (1) and (5)). In this manner metal alloys may be produced. For example, titanium - nickel, or aluminum - nickel alloy thin film deposits (usually produced by cosputtering) can be produced. These thin film materials, when alloyed properly with a small concentration of a ternary element (usually a rare-earth metal), can display large capacity for the chemisorption of hydrogen. Using such a material as a hydrogen storage system can have application in battery and fuel cell technology.

Chromium - cobalt compounds in thin film coating form have recently found application in electronic information storage technology, as a material used in computer disk memory devices.

Organic molecules as well may be deposited to form coatings. Organic materials in bulk solid form (e.g. anthracene) may be heated to evaporate the long chain molecules into the gas-phase, so they may be convected by the inert carrier gas flow (see Figure (5)). The substrate may be heated or cooled during deposition to encourage or suppress further polymerization and cross-linking of the long chain molecules that have condensed onto the substrates surface. Alternately, monomers may be synthesized in the gas phase and then allowed to polymerize during their transport in the jet to the substrate, where they condense. The constituent reactants of such gas-phase synthesis reactions may be introduced into the flow via the mechanisms illustrated in Figures (4) and (6). Polymeric coatings can have useful insulating properties; they are used as chemical protective coatings, and certain polymers are known to have conducting and semiconducting properties.

These three demonstrations indicate the general method which is employed to make many various thin solid film materials. These films may be either conducting, semiconducting or insulating, but their uses are not limited to exploiting their electronic properties.

As will be seen, I have disclosed a method and apparatus with which can be deposited conductors and dielectrics as products such as solid layers or thin film (and then, if desired, further processed to power) composed of the following chemical species: Silicon, gold, tungsten, aluminum, magnesium, iron, carbon, chromium, cobalt, platinum, titanium, germanium and other metals; solid phases of ox-

ides, nitrides, hydrides, fluorides, and other compounds containing an oxidizing agent; including mixtures and alloys and compounds thereof in either crystal, polycrystal or amorphous phase. In addition the product can be an organic solid or a polymer. Additional understanding of the inventions disclosed will be found upon a reading of the claims of this disclosure.

Claims

1. A method of depositing a condensible gaseous material entrained in an inert carrier gas as a solid film onto a substrate surface unreactive to the condensible gaseous material comprising:
 - (a) forming a stream of inert carrier gas;
 - (b) transporting the condensible gaseous material and the stream of the inert carrier gas through a jet forming means toward the substrate surface at a speed high enough to prevent condensation of said gaseous material on said jet forming means;
 - (c) impinging the jet stream against the substrate to decelerate it to a speed low enough to effect a deposit in solid form of the condensible gaseous material on said substrate surface; and
 - (d) effecting relative movement having a lateral component between the substrate surface and the stream of inert carrier gas to dispose a substantially uniform thickness of solid condensible gaseous material on the substrate surface, characterised in that the condensible gaseous component to be deposited on the substrate is generated substantially contiguous to or within the means for forming a jet of the inert carrier gas.
2. A method according to Claim 1, wherein step (d) is carried out while impinging the jet stream on the substrate surface.
3. A method according to Claim 1 or Claim 2, wherein the condensible gaseous material is a metal.
4. A method according to any one of Claims 1 to 3, wherein the flow of inert carrier gas is effected by a mechanical pump means.
5. A method according to Claim 4, wherein the gas atmosphere in the deposition system is controlled by the flow of inert carrier gas which purges the flow system.
6. A method according to Claim 4 or Claim 5, wherein the flow of the fluid mixture is recirculated to a gas inlet of the deposition system via a recirculation tube.
7. A method according to any one of Claims 4 to 6, wherein the population of condensible molecules of the material to be deposited is substantially maintained within a flow region which insures that the molecules are far enough downstream in the flow of inert gas which transports said material that a saturated condensible vapor of the material will be convected past nozzle surfaces forming part of said jet forming means, which are provided to direct said gas, before the molecules have time to diffuse to and condense on said surfaces.
8. A method according to Claim 1, wherein molecules of one or more reaction precursor species for synthesis of the material to be deposited and destined for consumption in an evolving synthesis reaction or reactions occurring in the flow region of said inert gas stream, are premixed with inert carrier gas as an under-saturated vapor before synthesis of the material to be deposited.
9. A method according to Claim 8, wherein the species destined to be consumed in the evolving synthesis reactions is initially in solid or liquid phase bulk form, which is then heated until its vapor pressure rises so that the desired mass flow of reactant species is evaporated off into the inert gas stream.
10. A method according to Claim 9, wherein more than one reactant species is evaporated from more than one solid or liquid bulk material source into the inert gas stream.
11. A method according to Claim 8, wherein the species destined for consumption in the evolving synthesis reactions is a fluid which is delivered via a thin tube duct that exits into the region of the inert gas flow so as to be entrained in a stream flow field thereof.
12. A method according to any one of Claims 8 to 11, wherein any species so introduced into the inert gas flow can participate in chemical synthesis reactions which are controlled by the design geometry of a nozzle forming part of said jet forming means and which directly affects the flow conditions which govern the energies and trajectories of the reactant species.
13. A method according to any one of Claims 8 to

12, wherein synthesis reactions (including dissociation) are activated by energy addition to the molecules by energy means consisting of either:

- 1) heating at a hot solid surface, or
- 2) absorption of radiation, or
- 3) interaction with a plasma or gas discharge, or
- 4) any combination of such energy means.

14. A method according to Claim 1, wherein the production of overlay coatings on a supporting substrate is done in batch mode.

15. A method according to Claim 1, wherein the production of thin film overlay coatings on a supporting substrate is done in continuous mode through the use of gas gating means.

16. A method according to Claim 1, wherein deposited layers of coatings of differing materials are formed by the use of one or more nozzles to deposit one and then the next layer.

17. A method according to Claim 1, wherein a film product is deposited consisting of the following chemical species; silicon, gold, tungsten, aluminium, magnesium, iron, carbon, chromium, cobalt, platinum, titanium and germanium; solid phases of oxides, nitrides, hydrides, fluorides, and other compounds containing an oxidizing agent; or combination thereof, including mixtures and alloys and compounds thereof in either the crystalline, polycrystal or amorphous phase.

18. A method according to Claim 1, wherein the material to be deposited is introduced within an accelerating flow of the carrier gas jet continuum travelling at a speed sufficient to entrain the material, and the flow is regulated so as to define a local Stokes Number so as to achieve inertial impaction of the material to be deposited after the carrier gas jet leaves the jet forming means.

19. A method according to Claim 18, wherein the flow of the gas jet continuum is regulated by a throttle to change the Stokes Number to define a local Stokes Number so as to control the location of a transition zone adjacent to the target surface and the type of deposition which is to occur in the target area region.

20. A method according to Claim 1, wherein a synthesis reaction precursor species is entrained in a flow field of the gas jet continuum where decomposition or reaction with other

species so entrained form the material to be deposited in the form of saturated condensible vapor which condenses from the gas jet continuum adjacent to the target area.

21. A method according to Claim 1, wherein a saturated condensible vapor of the material to be deposited is confined within the flow field region of the gas jet continuum and transported downstream so quickly that substantially no migration from the gas occurs until the saturated condensible vapour reaches the region adjacent to the target surface.

22. A method according to Claim 1, wherein within a flow field defining aerodynamic confinement within a field of said gas jet continuum, reactions occur which complete formation of the material to be deposited before the gas jet reaches the target substrate.

23. A method according to Claim 1, wherein the gas jet continuum efficiently entrains and accelerates vapor molecules so as to cause inertial impaction of the vapor molecules onto the substrate.

24. A method according to Claim 1, wherein the gas jet continuum flows at a rate in excess of .1 Mach.

25. A method according to Claim 24, wherein the gas jet continuum flows at a rate in excess of .4 Mach.

26. A method according to Claim 25, wherein the gas jet continuum flows at a rate of Mach 1 or greater.

27. A method according to Claim 1, wherein the synthesis and formation as condensible vapor of the material to be deposited is isolated in the flow field of the gas jet continuum from the condensation through diffusion or inertial impaction of the condensible vapor which occurs in the region adjacent the target area.

28. A method according to Claim 1, wherein the gas jet continuum flow of inert gas is recirculated after reaching the region adjacent the target and after the depositing material is disentrained on the target substrate as an inert gas substantially free of entrained depositing material.

29. Apparatus for depositing a condensible gaseous material entrained in an inert carrier gas as a solid film on to a substrate comprising:

- (a) a nozzle (1-1);
 (b) a deposition chamber (1-2) located downstream of the nozzle;
 (c) a source of inert carrier gas (1-5);
 (d) a pump (1-14) located between said source and said nozzle adapted to induce a steady flow of said carrier gas from said source, through said nozzle and into said deposition chamber, the pressure created by said pump being such as to move said carrier gas at a high speed through said nozzle to form a jet (1-7);
 (e) means for supporting a substrate (1-10) in said deposition chamber with a surface thereof facing said jet;
 (f) means (1-12) for imparting relative lateral movement between said jet and said surface; and
 (g) said jet being decelerated when it leaves said nozzle by expanding and impinging on said surface so that said material moves over said surface at a speed low enough for it to be deposited thereon and characterised by comprising means (3-3) contiguous to, or within, said nozzle for entraining said condensable gaseous material in said carrier gas so that said material is transported through said nozzle at a speed high enough to prevent it from condensing on the nozzle walls.
30. Apparatus according to Claim 29, wherein said pump is a mechanical pump.
31. Apparatus according to Claim 29 or 30, further comprising means for heating and/or cooling said substrate.
32. Apparatus according to any one of Claims 29 to 31, further comprising means for heating and/or cooling said inert carrier gas.
33. Apparatus according to any one of Claims 29 to 32, further comprising means for recirculating said inert carrier gas.
34. Apparatus according to any one of Claims 29 to 33, wherein the geometry of said nozzle controls the thermodynamic and gas-dynamic flow conditions in order to promote and optimise chemical synthesis reactions taking place in said gas stream.
35. Apparatus according to any one of Claims 29 to 34, wherein said relative movement effecting means comprises means for moving said substrate relative to a stationary nozzle acting to form said jet.

36. Apparatus according to any one of Claims 29 to 34, wherein said relative movement effecting means comprises means for moving a nozzle acting to form said jet relative to a stationary substrate.
37. Apparatus according to any one of Claims 29 to 36, wherein said substrate is in the form of a body having an overall breadth much greater than the width of said jet.
38. Apparatus as claimed in any one of Claims 29 to 37, wherein said substrate has a sharp edge.
39. Apparatus as claimed in any one of Claims 29 to 36, wherein said substrate has a breadth and curvature comparable with the width and curvature of said jet.
40. Apparatus as claimed in any one of Claims 29 to 39, wherein means are provided for removing deposited material from a stagnation point on the surface of said substrate at which point said jet impinges, whereby the removed material is powdered.
41. Apparatus according to any one of Claims 29 to 39, wherein means are provided for removing deposited material from said substrate surface in ribbon or sheet form.

Revendications

1. Procédé de dépôt d'un matériau gazeux condensable entraîné dans un gaz porteur inerte sous la forme d'une pellicule solide sur une surface de substrat inerte vis-à-vis du matériau gazeux condensable, comportant les étapes consistant à :
- (a) former un flux de gaz porteur inerte ;
 (b) transporter le matériau gazeux condensable et le flux de gaz porteur inerte à travers un moyen formant un jet vers la surface du substrat à une vitesse suffisamment élevée pour empêcher une condensation dudit matériau gazeux sur ledit moyen formant un jet ;
 (c) projeter le flux du jet contre le substrat pour le ralentir à une vitesse suffisamment basse pour effectuer un dépôt sous forme solide du matériau gazeux condensable sur ladite surface du substrat ; et
 (d) provoquer un mouvement relatif ayant une composante latérale entre la surface du substrat et le flux de gaz porteur inerte pour déposer une épaisseur sensiblement uniforme de matériau gazeux condensable solide

sur la surface du substrat, caractérisé en ce que le composant gazeux condensable devant être déposé sur le substrat est généré sensiblement adjacent à ou à l'intérieur du moyen pour former un jet du gaz porteur inerte.

2. Procédé selon la revendication 1, dans lequel l'étape (d) est effectuée tout en projetant le flux de jet sur la surface du substrat.

3. Procédé selon la revendication 1 ou la revendication 2, dans lequel le matériau gazeux condensable est un métal.

4. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel le flux de gaz porteur inerte est obtenu par une pompe mécanique.

5. Procédé selon la revendication 4, dans lequel l'atmosphère gazeuse dans le système de dépôt est commandée par l'écoulement du gaz porteur inerte qui purge le système d'écoulement.

6. Procédé selon la revendication 4 ou la revendication 5, dans lequel l'écoulement du mélange fluide est recyclé à un orifice d'admission de gaz du système de dépôt par l'intermédiaire d'un tube de recyclage.

7. Procédé selon l'une quelconque des revendications 4 à 6, dans lequel la population de molécules condensables du matériau devant être déposé est sensiblement maintenue à l'intérieur d'une région d'écoulement qui assure que les molécules sont suffisamment éloignées en aval dans le flux de gaz inerte qui transporte ledit matériau pour qu'une vapeur condensable saturée du matériau soit entraînée par convection au delà des surfaces de la buse formant une partie dudit moyen de formation de jet, qui sont prévues pour diriger ledit gaz, avant que les molécules aient le temps de diffuser et de se condenser sur lesdites surfaces.

8. Procédé selon la revendication 1, dans lequel des molécules d'un ou de plusieurs précurseurs de réaction pour une synthèse du matériau devant être déposé et destinées à être consommées dans une ou dans des réactions provoquant une synthèse apparaissant dans la région d'écoulement dudit flux de gaz inerte, sont prémélangées au gaz porteur inerte sous la forme d'une vapeur non saturée avant synthèse du matériau devant être déposé.

9. Procédé selon la revendication 8, dans lequel le corps destiné à être consommé dans les réactions provoquant la synthèse est initialement sous forme pure en phase solide ou liquide, qui est ensuite chauffé jusqu'à ce que sa pression de vapeur s'élève de sorte que le débit désiré de produit réactif est évaporé dans le flux de gaz inerte.

10. Procédé selon la revendication 9, dans lequel plusieurs corps réactifs sont évaporés à partir de plusieurs sources de matériau pur solide ou liquide dans le flux de gaz inerte.

11. Procédé selon la revendication 8, dans lequel le corps destiné à être consommé dans les réactions provoquant la synthèse est un fluide qui est délivré par l'intermédiaire d'un conduit tubulaire mince débouchant dans la région de l'écoulement de gaz inerte de manière à être entraîné dans une région d'écoulement de flux de celui-ci.

12. Procédé selon l'une quelconque des revendications 8 à 11, dans lequel un corps réactif ainsi introduit dans l'écoulement de gaz inerte peut participer aux réactions de synthèse chimique qui sont commandées par la géométrie d'une buse constituant une partie dudit moyen de formation de jet et qui affecte directement les conditions d'écoulement qui régissent les énergies et les trajectoires du corps réactif.

13. Procédé selon l'une quelconque des revendications 8 à 12, dans lequel les réactions de synthèse (y compris la dissociation) sont activées par apport d'énergie aux molécules par des moyens énergétiques consistant soit :

- 1) en un chauffage sur une surface solide chaude, soit
- 2) absorption d'un rayonnement, soit
- 3) interaction avec un plasma ou une décharge dans un gaz, soit
- 4) une combinaison quelconque de ces moyens énergétiques.

14. Procédé selon la revendication 1, dans lequel la réalisation de revêtements sur un substrat support est effectuée par lots.

15. Procédé selon la revendication 1, dans lequel la réalisation de revêtements en pellicule mince sur un substrat support est effectuée en mode continu grâce à l'utilisation de moyens de transfert de gaz.

16. Procédé selon la revendication 1, dans lequel des couches déposées de revêtements de dif-

férents matériaux sont formées par l'utilisation d'une ou de plusieurs buses pour en déposer une et ensuite la couche suivante.

17. Procédé selon la revendication 1, dans lequel une pellicule est déposée constituée des produits chimiques suivants ; silicium, or, tungstène, aluminium, magnésium, fer, carbone, chrome, cobalt, platine, titane et germanium ; des phases solides d'oxydes, de nitrures, d'hydru-
res, de fluorures, et d'autres composés contenant un agent oxydant ; ou une combinaison de ceux-ci, y compris des mélanges et alliages et composés de ceux-ci en phase cristalline, polycristalline ou amorphe. 5
18. Procédé selon la revendication 1, dans lequel le matériau devant être déposé est introduit à l'intérieur d'un écoulement d'accélération du jet continu de gaz porteur se déplaçant à une vitesse suffisante pour entraîner le matériau, et l'écoulement est régulé de manière à définir un Nombre de Stokes local, de manière à obtenir un choc par inertie du matériau devant être déposé après que le jet de gaz porteur a quitté le moyen formant le jet. 10
19. Procédé selon la revendication 18, dans lequel l'écoulement du jet continu de gaz est régulé par un étranglement afin de modifier le Nombre de Stokes pour définir un Nombre de Stokes local de manière à commander l'emplacement d'une zone de transition adjacente à la surface de la cible et le type de dépôt devant se produire dans la région de la surface de la cible. 15
20. Procédé selon la revendication 1, dans lequel un précurseur de réaction de synthèse est entraîné dans une région d'écoulement du jet continu de gaz où une décomposition ou une réaction avec d'autres produits ainsi entraînés forment le matériau devant être déposé sous la forme de vapeur condensable saturée qui se condense à partir du jet continu de gaz adjacent à la surface de la cible. 20
21. Procédé selon la revendication 1, dans lequel une vapeur condensable saturée du matériau devant être déposé est confinée à l'intérieur de la région du domaine d'écoulement du jet continu de gaz et transportée en aval rapidement de sorte que pratiquement aucune migration depuis le gaz ne se produit jusqu'à ce que la vapeur condensable saturée atteigne la région adjacente à la surface de la cible. 25
22. Procédé selon la revendication 1, dans lequel

à l'intérieur d'un confinement aérodynamique délimitant une région d'écoulement à l'intérieur d'une région dudit jet continu de gaz, des réactions se produisent qui complètent la formation du matériau devant être déposé avant que le jet de gaz n'atteigne le substrat de la cible.

23. Procédé selon la revendication 1, dans lequel le jet de gaz continu entraîne efficacement et accélère les molécules de vapeur de manière à provoquer un choc par inertie des molécules de vapeur sur le substrat. 10
24. Procédé selon la revendication 1, dans lequel le jet de gaz continu s'écoule à une vitesse dépassant 0,1 Mach. 15
25. Procédé selon la revendication 24, dans lequel le jet de gaz continu s'écoule à une vitesse dépassant 0,4 Mach. 20
26. Procédé selon la revendication 25, dans lequel le jet de gaz continu s'écoule à une vitesse de Mach 1 ou plus. 25
27. Procédé selon la revendication 1, dans lequel la synthèse et la formation en tant que vapeur condensable du matériau devant être déposé sont isolées dans la région d'écoulement du jet de gaz continu de la condensation par diffusion ou choc par inertie de la vapeur condensable qui se produit dans la région adjacente à la surface de la cible. 30
28. Procédé selon la revendication 1, dans lequel l'écoulement continu du jet de gaz continu inerte est recyclé après avoir atteint la région adjacente à la cible et après que le matériau devant être déposé n'est plus entraîné sur le substrat de la cible en tant que gaz inerte sensiblement exempt de matériau de dépôt entraîné. 35
29. Dispositif pour déposer un matériau gazeux condensable entraîné dans un gaz porteur inerte sous la forme d'une pellicule solide d'un substrat comportant :
(a) une buse (1-1) ;
(b) une chambre de dépôt (1-2) située en aval de la buse ;
(c) une source de gaz porteur inerte (1-5) ;
(d) une pompe (1-14) disposée entre ladite source et ladite buse apte à provoquer un écoulement permanent dudit gaz porteur provenant de ladite source, à travers ladite buse et dans ladite chambre de dépôt, la pression créée par ladite pompe étant telle 40

qu'elle déplace ledit gaz porteur à une vitesse élevée à travers ladite buse pour former un jet (1-7) ;

(e) des moyens pour supporter un substrat (1-10) dans ladite chambre de dépôt avec une surface de celui-ci tournée vers ledit jet ;

(f) des moyens (1-12) pour conférer un mouvement latéral relatif entre ledit jet et ladite surface ; et

(g) ledit jet étant ralenti lorsqu'il quitte ladite buse par détente et choc sur ladite surface de sorte que ledit matériau se déplace sur ladite surface à une vitesse suffisamment basse pour qu'il soit déposé sur celle-ci et caractérisé en ce qu'il comporte des moyens (3-3) adjacents à, ou à l'intérieur de ladite buse pour entraîner ledit matériau gazeux condensable dans ledit gaz porteur de sorte que ledit matériau est transporté à travers ladite buse à une vitesse suffisamment élevée pour l'empêcher de se condenser sur les parois de la buse.

30. Dispositif selon la revendication 29, dans lequel ladite pompe est une pompe mécanique.

31. Dispositif selon la revendication 29 ou 30, comportant en outre des moyens pour chauffer et/ou refroidir ledit substrat.

32. Dispositif selon l'une quelconque des revendications 29 à 31, comportant en outre des moyens pour chauffer et/ou refroidir ledit gaz porteur inerte.

33. Dispositif selon l'une quelconque des revendications 29 à 32, comportant en outre des moyens pour recycler ledit gaz porteur inerte.

34. Dispositif selon l'une quelconque des revendications 29 à 33, dans lequel la géométrie de ladite buse commande les conditions d'écoulement thermodynamique et dynamique du gaz afin de favoriser et d'optimiser les réactions de synthèse chimique se produisant dans ledit flux de gaz.

35. Dispositif selon l'une quelconque des revendications 29 à 34, dans lequel lesdits moyens effectuant un mouvement relatif comportent des moyens pour déplacer ledit substrat par rapport à une buse stationnaire agissant pour former ledit jet.

36. Dispositif selon l'une quelconque des revendications 29 à 34, dans lequel lesdits moyens effectuant le mouvement relatif comportent des

moyens pour déplacer une buse agissant pour former ledit jet par rapport à un substrat stationnaire.

5 37. Dispositif selon l'une quelconque des revendications 29 à 36, dans lequel ledit substrat est sous la forme d'un corps possédant une largeur globale beaucoup plus grande que la largeur dudit jet.

10 38. Dispositif selon l'une quelconque des revendications 29 à 37, dans lequel ledit substrat possède un bord vif.

15 39. Dispositif selon l'une quelconque des revendications 29 à 36, dans lequel ledit substrat possède une largeur et une courbure comparables à la largeur et à la courbure dudit jet.

20 40. Dispositif selon l'une quelconque des revendications 29 à 39, dans lequel des moyens sont prévus pour éliminer le matériau déposé depuis un point de stagnation sur la surface dudit substrat, point auquel frappe ledit jet, de telle sorte que le matériau éliminé est réduit en poudre.

25 41. Dispositif selon l'une quelconque des revendications 29 à 39, dans lequel des moyens sont prévus pour retirer le matériau déposé de ladite surface du substrat sous forme de ruban ou de feuille.

Patentansprüche

35 1. Ein Verfahren zum Niederschlagen eines von einem inerten Trägergas mitgeführten kondensierbaren gasförmigen Stoffes als Feststoffschicht auf eine nicht mit dem kondensierbaren gasförmigen Stoff reagierende Substratoberfläche, welches Verfahren

(a) die Bildung eines inerten Trägergasstromes,

(b) den Transport des kondensierbaren gasförmigen Stoffes und des inerten Trägergasstromes durch strahlbildende Mittel hindurch in Richtung auf die Substratoberfläche bei einer Geschwindigkeit, welche hoch genug ist, um die Kondensation des genannten gasförmigen Stoffes auf den genannten strahlbildenden Mitteln zu verhindern,

(c) das Auftreffen des Strahls auf dem Substrat, so daß dieser auf eine Geschwindigkeit abgebremst wird, welche niedrig genug ist, um einen Niederschlag des kondensierbaren gasförmigen Stoffes in fester Form auf die genannte Substratoberfläche zu be-

wirken, und

(d) die Erzeugung einer Relativbewegung mit einer seitlichen Komponente zwischen der Substratoberfläche und dem inerten Trägergasstrom, so daß auf der Substratoberfläche der kondensierbare gasförmige Stoff in fester Form in im wesentlichen gleichmäßiger Dicke abgelagert wird,

umfaßt und dadurch gekennzeichnet ist, daß die auf das Substrat niederschlagende kondensierbare gasförmige Komponente im wesentlichen in der Nähe oder innerhalb der Mittel zur Bildung des inerten Trägergasstromes erzeugt wird.

2. Ein Verfahren gemäß Anspruch 1, wobei Schritt (d) ausgeführt wird, während der Strahl auf die Substratoberfläche auftrifft.

3. Ein verfahren gemäß Anspruch 1 oder Anspruch 2, wobei der kondensierbare gasförmige Stoff ein Metall ist.

4. Ein Verfahren gemäß einem der Ansprüche 1 bis 3, wobei der Strom des inerten Trägergases durch mechanische Pumpmittel bewirkt wird.

5. Ein verfahren gemäß Anspruch 4, wobei die Gasatmosphäre in dem Niederschlagssystem durch den Strom des inerten Trägergases gesteuert wird, welches das Strömungssystem spült.

6. Ein Verfahren gemäß Anspruch 4 oder Anspruch 5, wobei der Strom des fluiden Gemisches durch ein Rückführrohr im Kreislauf zu einem Gaseinlaß des Niederschlagssystems zurückgeführt wird.

7. Ein Verfahren gemäß einem der Ansprüche 4 bis 6, wobei die Population kondensierbarer Moleküle des niederschlagenden Stoffes im wesentlichen innerhalb eines Strömungsbereichs gehalten wird, welcher sicherstellt, daß sich die Moleküle in dem Strom des den genannten Stoff transportierenden inerten Gases genügend weit stromabwärts befinden, so daß ein gesättigter kondensierbarer Dampf des Stoffes an den zu den genannten strahlbildenden Mitteln gehörigen, für die Lenkung des genannten Gases vorgesehenen Düsenoberflächen vorbeibewegt wird, bevor die Moleküle Zeit haben, zu der genannten Oberfläche zu diffundieren und auf dieser zu kondensieren.

8. Ein Verfahren gemäß Anspruch 1, wobei Moleküle einer oder mehrerer Arten von Reaktions-

vorläufern für die Synthese des niederschlagenden Stoffes, welche zur Umsetzung in einer oder mehreren sich im Strömungsbereich des genannten inerten Gasstromes entwickelnden Synthesereaktionen bestimmt sind, vor der Synthese des niederschlagenden Stoffes als untersättigter Dampf mit inertem Trägergas vorgemischt werden.

9. Ein Verfahren gemäß Anspruch 8, wobei die zur Umsetzung in den sich entwickelnden Synthesereaktionen bestimmte Molekülart anfänglich in fester oder flüssiger Phase als loses Gut vorliegt, welches dann erwärmt wird, bis sein Dampfdruck ansteigt, so daß die an den Reaktionen teilnehmende Molekülart mit dem gewünschten Massenstrom der in den inerten Gasstrom hinein verdampft wird.

10. Ein Verfahren gemäß Anspruch 9, wobei mehr als eine an den Reaktionen teilnehmende Molekülart aus mehr als einer Quelle festen oder flüssigen losen Gutes in den inerten Gasstrom hinein verdampft wird.

11. Ein Verfahren gemäß Anspruch 8, wobei die zur Umsetzung in den sich entwickelnden Synthesereaktionen bestimmte Molekülart eine Flüssigkeit ist, welche durch eine in den Bereich des inerten Gasstromes mündende dünne Rohrleitung hindurch zugeführt wird, so daß sie in einem Strömungsfeld desselben mitgeführt wird.

12. Ein Verfahren gemäß einem der Ansprüche 8 bis 11, wobei jede derart in den inerten Gasstrom eingeleitete Molekülart an chemischen Synthesereaktionen teilnehmen kann, welche durch die Konstruktionsgeometrie einer zu den genannten strahlbildenden Mitteln gehörigen Düse gesteuert werden, welche die die Energien und Bahnkurven der an den Reaktionen teilnehmenden Molekülararten bestimmenden Strömungsbedingungen unmittelbar beeinflusst.

13. Ein Verfahren gemäß einem der Ansprüche 8 bis 11, wobei Synthesereaktionen (einschließlich Dissoziation) durch Energiezufuhr zu den Molekülen durch energetische Vorgänge aktiviert werden, welche entweder aus
1) der Erwärmung an einer heißen, festen Oberfläche oder
2) der Absorption von Strahlung oder
3) der Wechselwirkung mit einem Plasma oder einer Gasentladung oder
4) einer beliebigen Kombination solcher energetischen Vorgänge bestehen.

14. Ein Verfahren gemäß Anspruch 1, wobei Deckbeschichtungen auf einem Trägersubstrat partieweise hergestellt werden.
15. Ein Verfahren gemäß Anspruch 1, wobei Dünnschicht-Deckbeschichtungen auf einem Trägersubstrat mittels Verwendung von Gasabsperrmitteln kontinuierlich hergestellt werden.
16. Ein Verfahren gemäß Anspruch 1, wobei niedergeschlagene Überzugsschichten aus unterschiedlichen Stoffen dadurch gebildet werden, daß mittels einer oder mehrerer Düsen zunächst die eine und danach die nächste Schicht niedergeschlagen wird.
17. Ein Verfahren gemäß Anspruch 1, wobei ein Schichtprodukt niedergeschlagen wird, welches aus den folgenden Molekülarten besteht: Silizium, Gold, Wolfram, Aluminium, Magnesium, Eisen, Kohlenstoff, Chrom, Kobalt, Platin, Titan und Germanium, festen Phasen von Oxiden, Nitriden, Hydriden, Fluoriden und anderen ein Oxidationsmittel enthaltenden Verbindungen, oder Kombinationen hiervon einschließlich Gemischen und Legierungen und Verbindungen dieser in entweder kristalliner oder polykristalliner oder amorpher Phase.
18. Ein Verfahren gemäß Anspruch 1, wobei der niederzuschlagende Stoff in einen sich beschleunigenden Strom des Trägergasstrahlkontinuums eingeleitet wird, welcher sich mit einer zum Mitreißen des Stoffes ausreichenden Geschwindigkeit bewegt, und wobei der Strom so geregelt wird, daß er eine lokale Stokessche Zahl so definiert, daß Inertialimpaktion des niederzuschlagenden Stoffes erreicht wird, nachdem der Trägergasstrom die strahlbildenden Mittel verlassen hat.
19. Ein Verfahren gemäß Anspruch 18, wobei der Strom des Gasstrahlkontinuums zwecks Veränderung der Stokesschen Zahl durch eine Drossel so geregelt wird, daß eine lokale Stokessche Zahl so definiert wird, daß die Lage einer Übergangszone in unmittelbarer Nähe der Targetoberfläche und der im Targetflächenbereich auftretende Niederschlagstyp gesteuert werden.
20. Ein Verfahren gemäß Anspruch 1, wobei eine Synthesereaktionsvorläufer-Molekülart in einem Strömungsfeld des Gasstrahlkontinuums mitgeführt wird, in welchem Zersetzung oder Reaktion mit anderen auf diese Weise mitgeführten Molekülarten den niederzuschlagenden Stoff in Form von gesättigtem kondensierbarem Dampf bildet, welcher in unmittelbarer Nähe der Targetfläche aus dem Gasstrahlkontinuum kondensiert.
21. Ein Verfahren gemäß Anspruch 1, wobei ein gesättigter kondensierbarer Dampf des niederzuschlagenden Stoffes auf den Strömungsfeldbereich in dem Gasstrahlkontinuum beschränkt und so schnell stromabwärts transportiert wird, daß im wesentlichen keine Wanderung aus dem Gas auftritt, bis der gesättigte kondensierbare Dampf den Bereich in unmittelbarer Nähe der Targetfläche erreicht.
22. Ein Verfahren gemäß Anspruch 1, wobei in einem Strömungsfeld, welches die aerodynamische Beschränkung auf das Innere eines Feldes des genannten Gasstrahlkontinuums definiert, Reaktionen auftreten, welche die Bildung des niederzuschlagenden Stoffes abschließen, bevor der Gasstrom die Targetoberfläche erreicht.
23. Ein Verfahren gemäß Anspruch 1, wobei das Gasstrahlkontinuum Dampfmoleküle wirksam mitführt und beschleunigt, so daß es eine Inertialimpaktion der Dampfmoleküle auf das Substrat bewirkt wird.
24. Ein Verfahren gemäß Anspruch 1, wobei das Gasstrahlkontinuum mit einer Geschwindigkeit von mehr als 0,1 Mach strömt.
25. Ein Verfahren gemäß Anspruch 24, wobei das Gasstrahlkontinuum mit einer Geschwindigkeit von mehr als 0,4 Mach strömt.
26. Ein Verfahren gemäß Anspruch 25, wobei das Gasstrahlkontinuum mit einer Geschwindigkeit von Mach 1 oder mehr strömt.
27. Ein Verfahren gemäß Anspruch 1, wobei Synthese und Bildung des niederzuschlagenden Stoffes als kondensierbarer Dampf in dem Strömungsfeld des Gasstrahlkontinuums von der Kondensation durch Diffusion oder Inertialimpaktion des kondensierbaren Dampfes, welche in dem Bereich in unmittelbarer Nähe der Targetfläche erfolgt, getrennt sind.
28. Ein Verfahren gemäß Anspruch 1, wobei die Gasstrahlkontinuumsströmung des inerten Gases im Kreislauf zurückgeführt wird, nachdem sie den Bereich in unmittelbarer Nähe des Targets erreicht hat und nachdem der Niederschlagsstoff auf dem Targetsubstrat als ein inertes Gas, welches im wesentlichen frei von mitgeführtem Niederschlagsstoff ist, aus der

Strömung ausgefallen ist.

29. Gerät zum Niederschlagen eines in einem inerten Trägergas mitgeführten kondensierbaren gasförmigen Stoffes als eine feste Schicht auf einem Substrat, welches Gerät

(a) eine Düse (1-1),
(b) eine stromabwärts von der Düse angeordnete Niederschlagskammer (1-2),

(c) eine Quelle von inertem Trägergas (1-5),

(d) eine Pumpe (1-14), welche zwischen der genannten Quelle und der genannten Düse angeordnet ist, um eine stetige Strömung des genannten Trägergases aus der genannten Quelle durch die genannte Düse und in die genannte Niederschlagskammer hinein herbeizuführen, wobei der durch die genannte Pumpe erzeugte Druck so hoch ist, daß das genannte Trägergas mit hoher Geschwindigkeit durch die genannte Düse hindurchbewegt wird und einen Strahl (1-7) bildet,

(e) Mittel zur Halterung eines Substrats (1-10) in der genannten Niederschlagskammer, wobei eine Oberfläche desselben dem genannten Strahl zugekehrt ist,

(f) Mittel (1-12) zur Herbeiführung einer relativen seitlichen Bewegung des genannten Strahls gegenüber der genannten Oberfläche umfaßt, während

(g) der genannte Strahl beim Verlassen der genannten Düse durch Expansion und Aufprall auf die genannte Oberfläche abgebremst wird, so daß sich der genannte Stoff über die genannte Oberfläche mit einer Geschwindigkeit bewegt, welche so niedrig ist, daß er sich auf dieser niederschlägt, dadurch gekennzeichnet, daß es in unmittelbarer Nähe oder innerhalb der genannten Düse Mittel (3-3) umfaßt, um den genannten kondensierbaren gasförmigen Stoff bei so hoher Geschwindigkeit durch die genannte Düse zu transportieren, daß er am Kondensieren auf den Düsenwänden gehindert wird.

30. Gerät gemäß Anspruch 29, wobei die genannte Pumpe eine mechanische Pumpe ist.

31. Gerät gemäß Anspruch 29 oder 30, welches ferner Mittel zum Erwärmen und/oder Kühlen des genannten Substrats umfaßt.

32. Gerät gemäß einem der Ansprüche 29 bis 31, welches ferner Mittel zum Erwärmen und/oder Kühlen des genannten inerten Trägergases umfaßt.

33. Gerät gemäß einem der Ansprüche 29 bis 32, welches ferner Mittel zum Rückführen des genannten inerten Trägergases in den Kreislauf umfaßt.

34. Gerät gemäß einem der Ansprüche 29 bis 33, wobei die Geometrie der genannten Düse die thermodynamischen und gasdynamischen Strömungsbedingungen steuert, um die in dem genannten Gasstrom stattfindenden chemischen Synthesereaktionen zu beschleunigen und zu optimieren.

35. Gerät gemäß einem der Ansprüche 29 bis 34, wobei die Mittel zur Herbeiführung der genannten Relativbewegung Mittel zur Bewegung des genannten Substrats relativ zu einer stationären, die Bildung des genannten Strahls bewirkenden Düse umfassen.

36. Gerät gemäß einem der Ansprüche 29 bis 34, wobei die genannten Mittel zur Herbeiführung der Relativbewegung Mittel zur Bewegung einer der Bildung des genannten Strahl dienenden Düse relativ zu einem stationären Substrat umfassen.

37. Gerät gemäß einem der Ansprüche 29 bis 36, wobei das genannte Substrat die Form eines Körpers aufweist, dessen Gesamtbreite viel größer als die Breite des genannten Strahls ist.

38. Gerät gemäß einem der Ansprüche 29 bis 37, wobei das genannte Substrat eine scharfe Kante aufweist.

39. Gerät gemäß einem der Ansprüche 29 bis 36, wobei das genannte Substrat eine Breite und eine Krümmung aufweist, welche mit der Breite und der Krümmung des genannten Strahls vergleichbar sind.

40. Gerät gemäß einem der Ansprüche 29 bis 39, wobei Mittel zum Entfernen des niedergeschlagenen Stoffes von einem auf der Oberfläche des genannten Substrats gelegenen Staupunkt, in welchem der genannte Strahl auftrifft, vorgesehen sind, wodurch der entfernte Stoff pulverisiert wird.

41. Gerät gemäß einem der Ansprüche 29 bis 39, wobei Mittel zum Entfernen des niedergeschlagenen Stoffes an der genannten Substratoberfläche in Band- oder Plattenform vorgesehen sind.

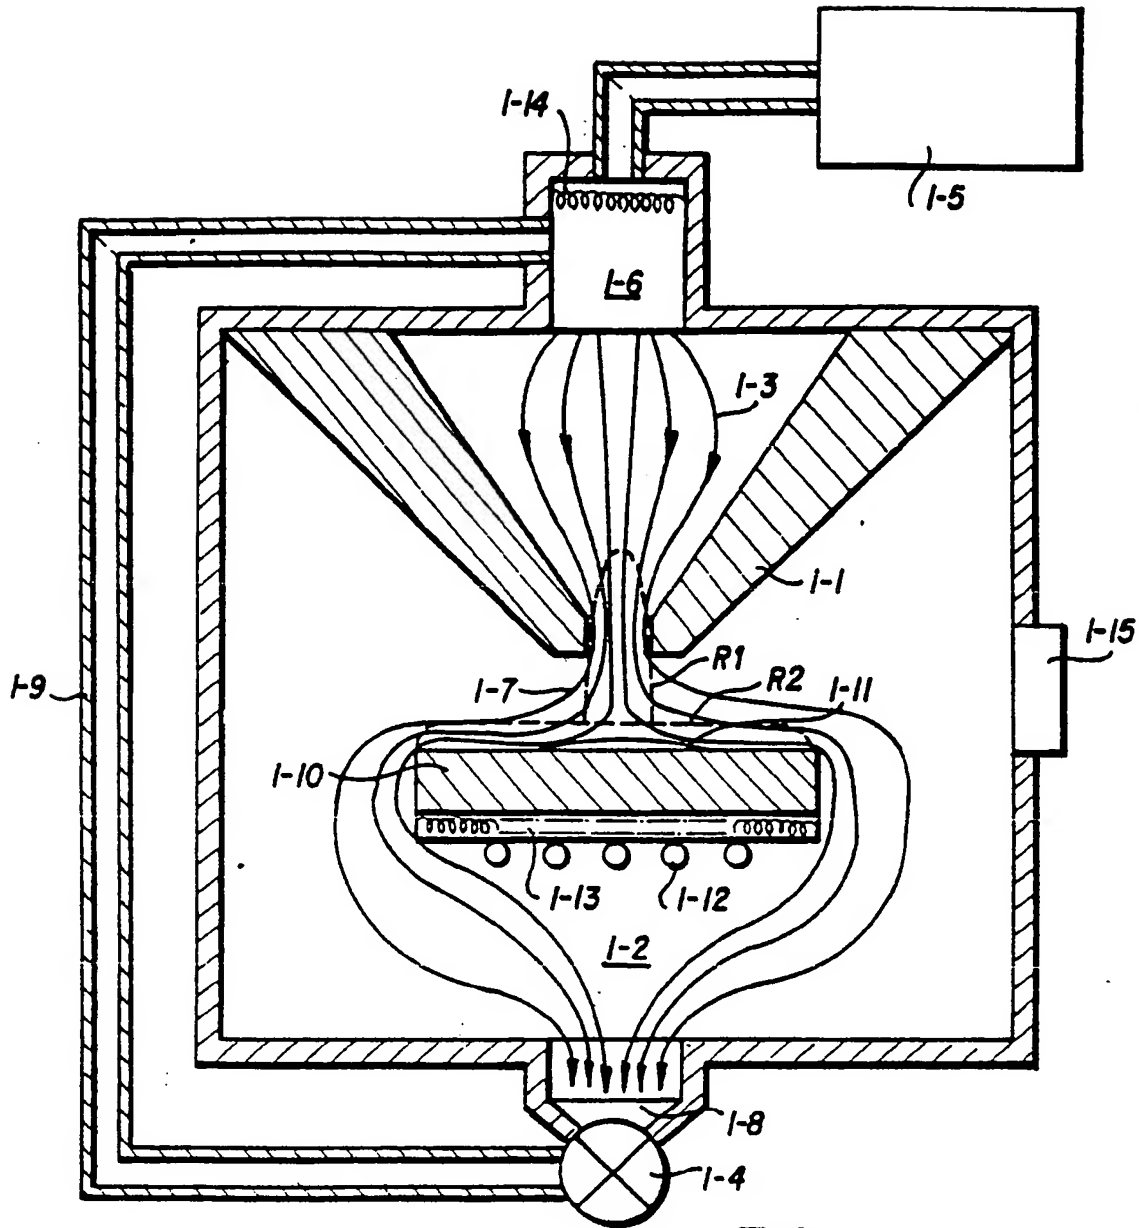


FIG. 1

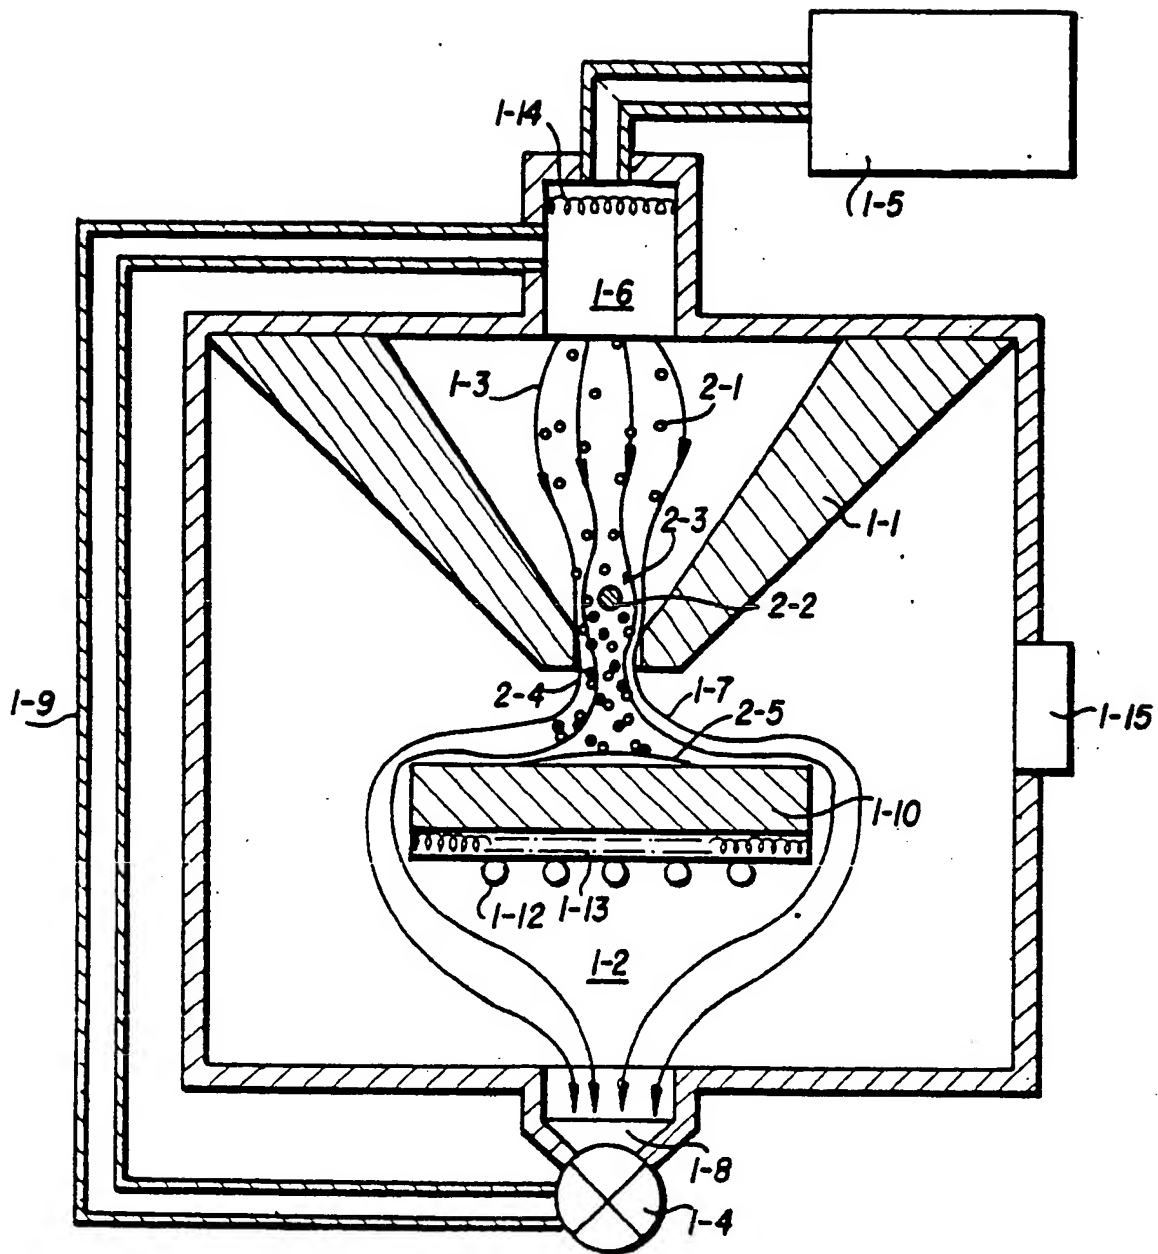


FIG. 2

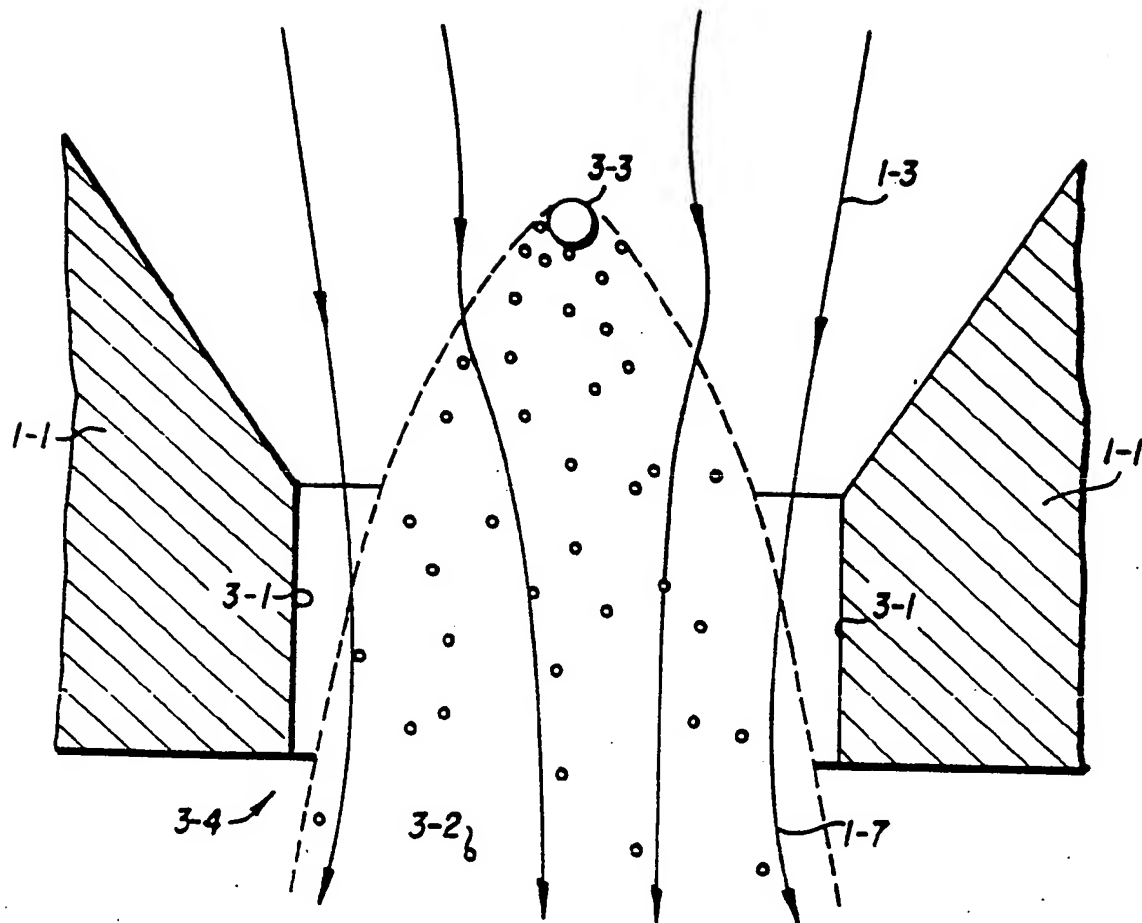


FIG. 3

FIG. 4

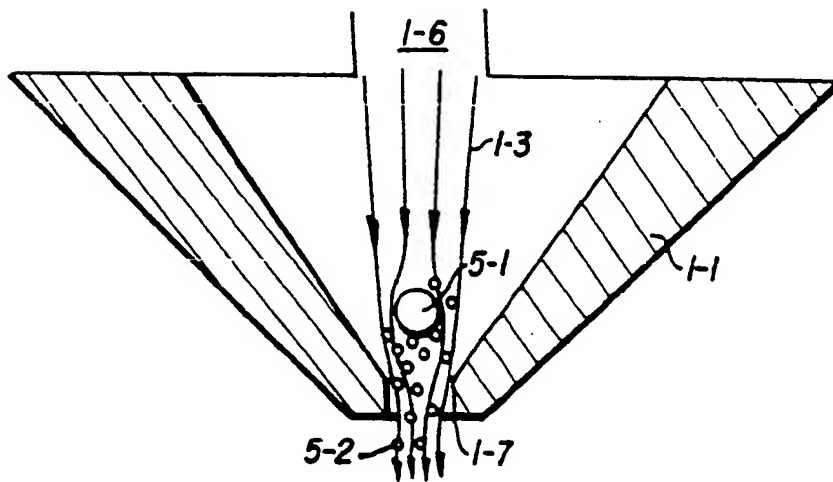
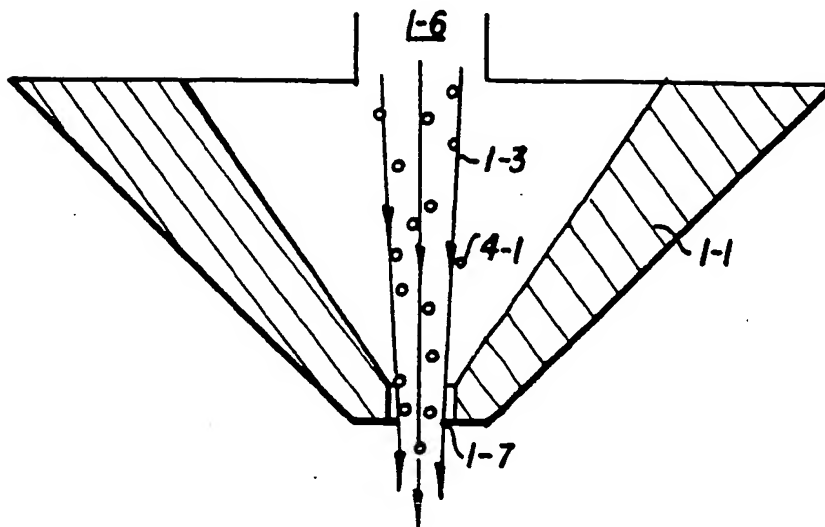
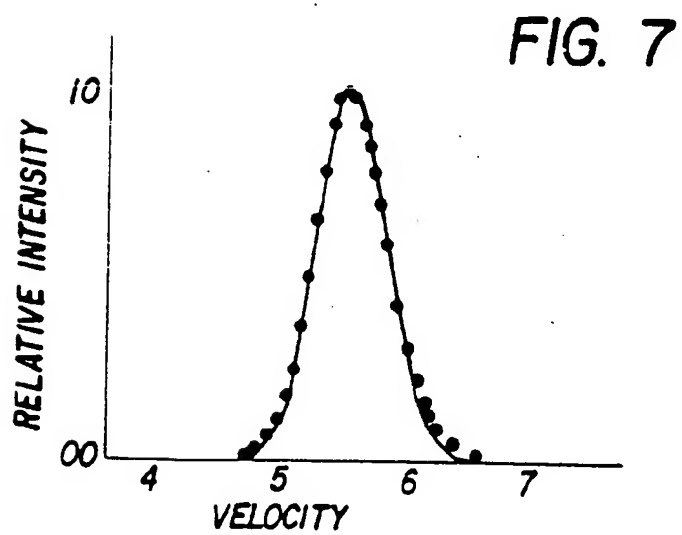
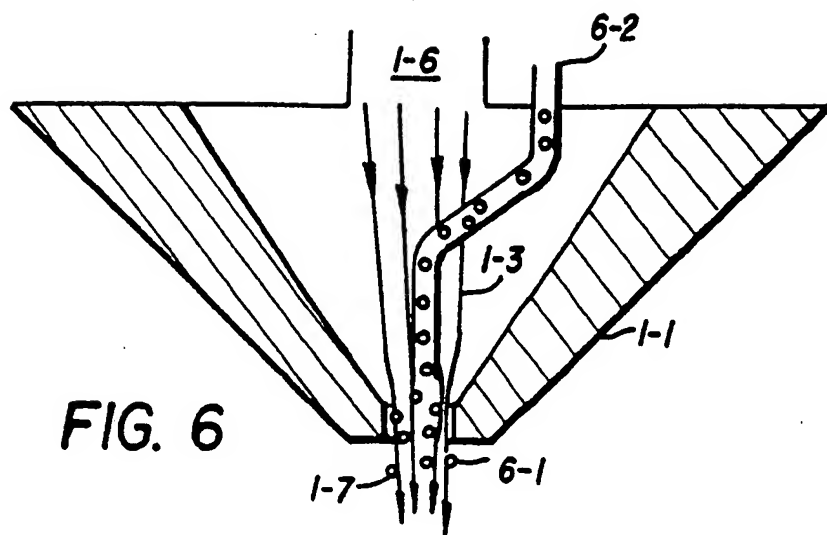
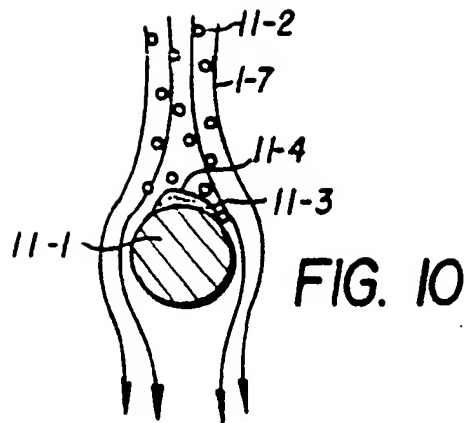
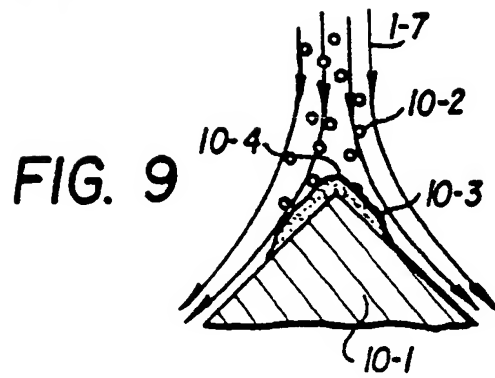
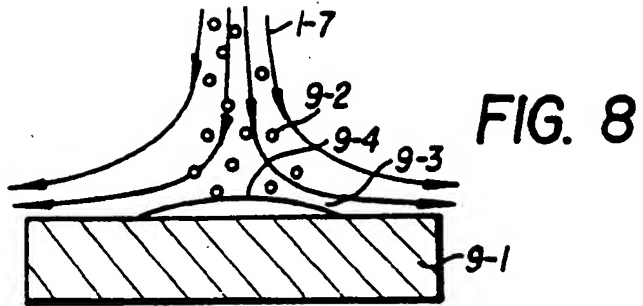
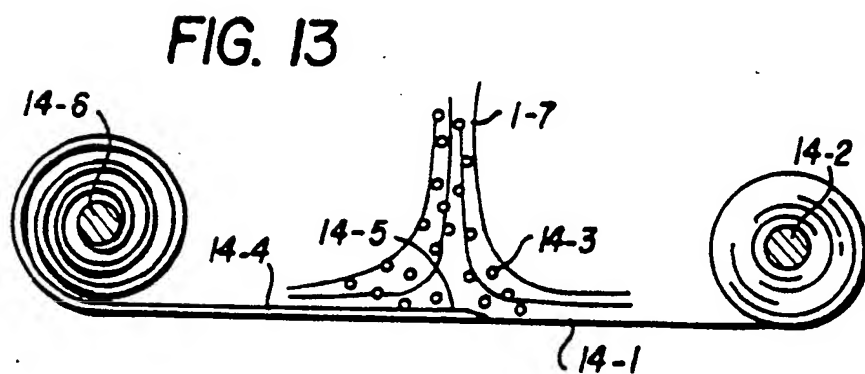
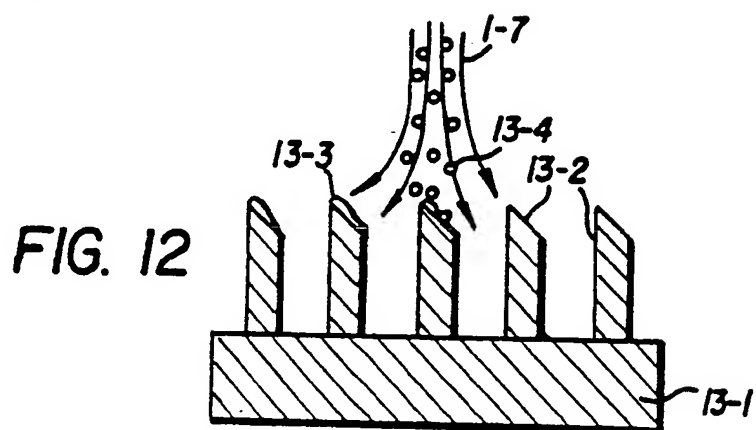
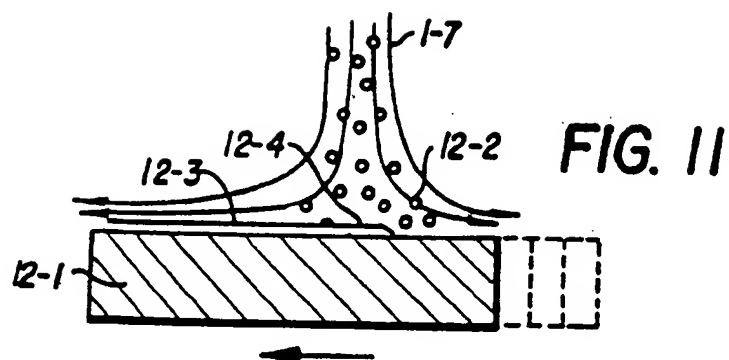


FIG. 5







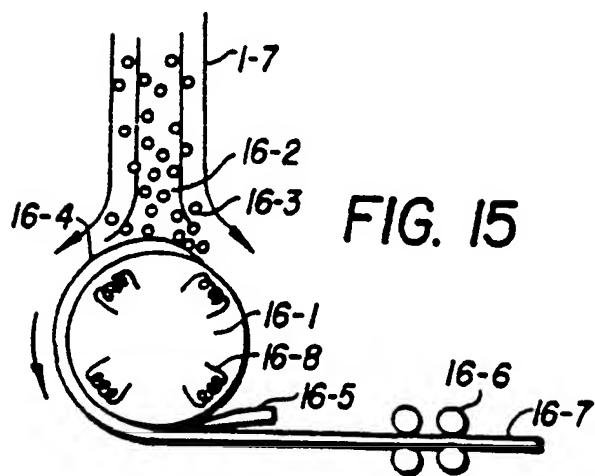
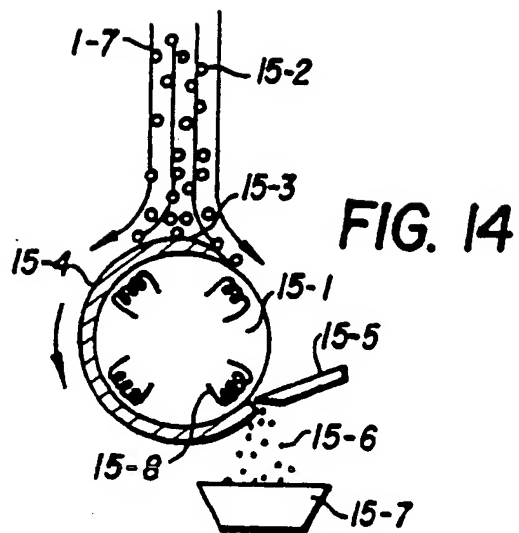


FIG. 16

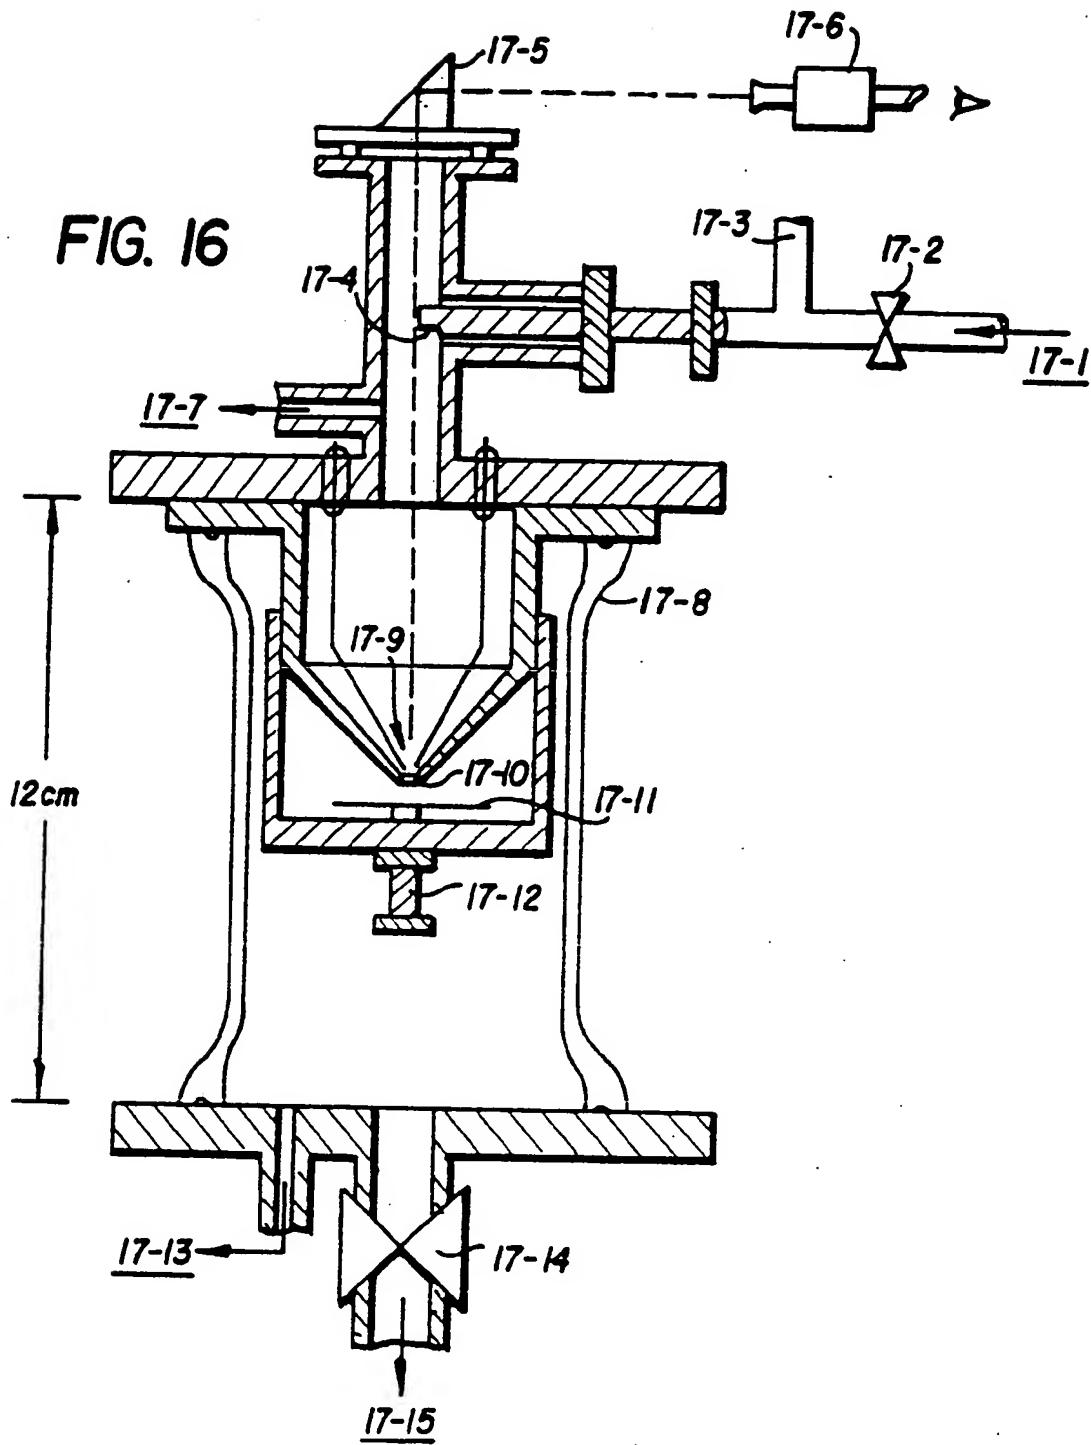


FIG. 17-1


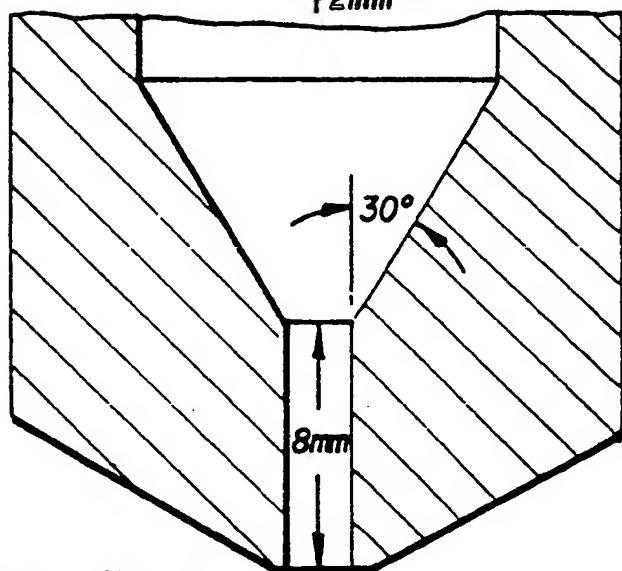


FIG. 17-2

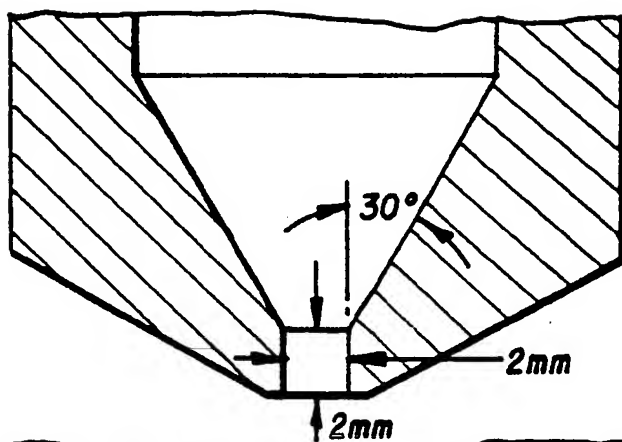